

BUDI-2S FIST

Building distribution enclosure

What is BUDI?

BUDI is a product range of compact wall mountable fiber enclosures for indoor and outdoor use. The enclosures are specifically designed for fast deployment and easy customer connection.


Available with splicing and/or patching capabilities, high connector density, small and larger footprints, they offer flexible solutions for a wide range of applications in the access network.

Features

- Designed to operate in outdoor locations (IEC61753-1 cat. C), outdoor ground location (IEC 61753-1 cat G) and arial locations (IEC61753-1 cat. A)
- Material: LSZH, flame retardant and UV stable
- · Multiple cable ports and all wraparound
- Splice capacity up to 36 supporting SMOUV and ANT
- Patch panel with capacity up to 8SC or 12LC connectors
- Cable can be conventional cable or blown fiber including in this case a gas
- Included cable seals:
 - 1 x up to 10 mm diameter
 - 1 x 12 pigtails up to 3 mm diameter
- Including cable termination bracket:
 - 1 up to 10 mm
 - 1 x 12 cable up to 3 mm (splice application)
 - 1 x 12 cable up to 3 mm (splice/patch application)
- Cable termination bracket and grommet accessories available
- All adapters according to IEC 61755-1

home - **EnLighten**FTTH Solutions






Capacities

	BUDI-2S-SP	BUDI-2S-TA
UMS available for splicing		
cassettes	6	2
Splice capacity	36	12
Patch panel capacity SC/LC	no no	8/12
Loop capability (loose tube)	no	no
Loose capability (bare fiber)) no	no


Size

	BUDI-2S
A: Height box (mm)	260
B: Height cover (mm)	285
C: Width (mm)	155
D: Depth (mm)	60



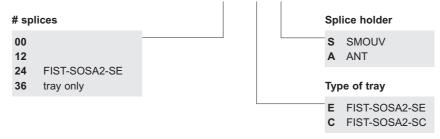

BUDI-2S-T - XX XX ES

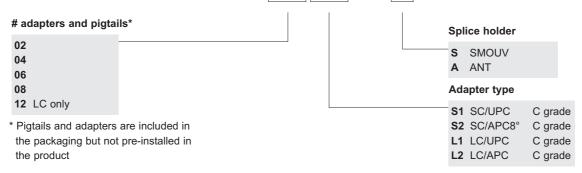

Accessories



Cable fixation bracket BUDI-2S-CTB-01



Grommet
BUDI-2S-SEAL-4x7-(57)
BUDI-2S-SEAL-12x3-(57)
BUDI-2S-SEAL-MAIN-01-(57)

Adapters (flangeless)

SC/UPC OC-ADP-S1-S1-NCFD-(24) SC/APC OC-ADP-S2-S2-NCFD-(24) LC/UPC OC-ADP-L1-L1-NCFD-(24) LC/APC OC-ADP-L2-L2-NCFD-(24)

Organizer trays

See the FIST-SOSA2 ordering guide

For more technical options and order quantity information, please consult the products ordering guides or your local sales representative.

SMOUV, TE (logo) and TE Connectivity are trademarks of the TE Connectivity group of companies and its licensors.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

Tyco Electronics Raychem bvba
Diestsesteenweg 692
3010 Kessel-Lo, Belgium
Tel 32-16 351 011 (USA)1-919-557-8900
Fax 32-16 351 697 (USA)1-919-557-8498
www.te.com
www.telecomnetworks.com
TC 1148/DS/3 04/13

