



FTUO

Fiber Termination Unit Outdoor

This box is typically used as a transition point where the OSP cable is spliced to an indoor cable.

Features


- Compact enclosure (168 x 132 x 33 mm)
- The box allows the installation of fibers with a minimum bend radius of 25 mm over a length of 2m.
- In-line and butt configuration possible for main cable
- Universal splice holder for 8 splices: SMOUV, ANT, RECORDsplice.
- Ready for TE Connectivity OCC1 splitter installation
- Cable inlet is provided at the bottom left side. Optionally the main cable can continue at the top left side. (wraparound pass-through)
- Cable outlet ports (max. 2 cables) are provided at 5 sides: left, right, top, bottom, back
- IP 43 when cable enters from bottom; IP40 when cable enters from top
- Impact rating: IK08
- UV resistant housing
- Standard colour: RAL7035 grey
- Gasventing provided
- Locking with screw, optionally security seal
- Main cable up to 12 mm diameter
- Drop cable up to 5 mm diameter

EnLighten
FTTH Solutions

Kit content

- Box with base, fiber organizer, cover
- Main cable seal + tiewraps + foam
- Drop cable seals for 2 drops and cable fixation accessories
- Universal splice holder for 8 splices (SMOUV, ANT, RECORDsplice)

FTUO - M - U - NN - 1

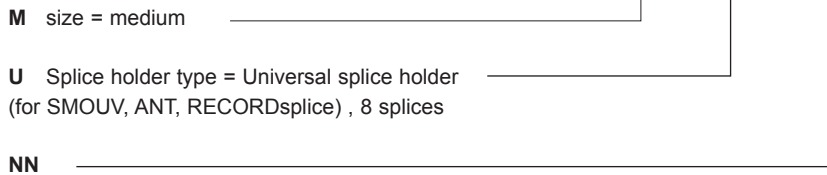

MOQ/SPQ = 10 pcs

Accessories

FTUO-USEAL-01	additional main cable seals (MOQ/SPQ = 500 pcs)
FTUO-OSEAL-01	additional drop cable seals (MOQ/SPQ = 1000 pcs)
CPWO-LABEL-7035-(1000)	security label to cover the access screw (RAL7035 colour) (MOQ/SPQ = 1000 pcs)

For more technical options and order quantity information, please consult the products ordering guides or your local sales representative.

SMOUV, RECORDsplice, TE (logo) and TE Connectivity are trademarks of the TE Connectivity group of companies and its licensors.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

Tyco Electronics Raychem bvba
Diestsesteenweg 692
3010 Kessel-Lo, Belgium
Tel 32-16 351 011 (USA)1-919-557-8900
Fax 32-16 351 697 (USA)1-919-557-8498
www.te.com
www.telecomnetworks.com
TC 1069/DS/2 09/11

