

Building distributor

Introduction

Suitable for FTTH applications where easily pre-connectorized splitters modules can be build in. The box is designed in such a way that it is suitable for both spliced and connectorized solutions of the riser cable.

Kit content



- Box
- Base tray
- Base tower
- Termination units
- Inserts for SMOUV and ANT

Accessories



- Tray kit

Seals

Wrap around cable seals

Sealblock 6 x 10 mm

Cable diameter (mm)	Foam (± 5 mm)
3	95
4	90
5	80
6	75
7	70
8	60
9	50
10	40

Sealblock 6 x 15 mm

Cable diameter (mm)	Foam (± 5 mm)
9	125
10	115
11	105
12	95
13	85
14	70
15	60

Sealblock 3 x 20 mm

Cable diameter (mm)	Foam (± 5 mm)
14	155
15	140
16	125
17	110
18	95
19	85
20	75

Sealblock 24 x 8 mm

Cable range A 1.8 – 5 mm
 B 5 – 7 mm


Sealblock rubber 1 x 18

To use in ports S6-S7 only
 Cable range 3 – 8 mm



Standard seals

- PG 16
- PG 21
- PG 29
- PG 29 (PTS 24)



1 Preparation of the box

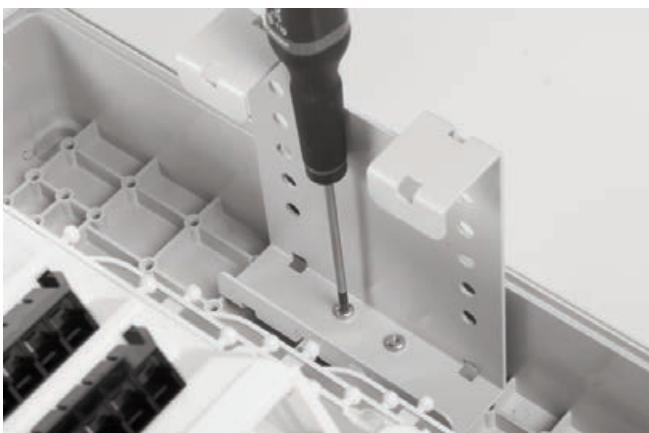


1.1 Install the bracket if loop storage is needed.

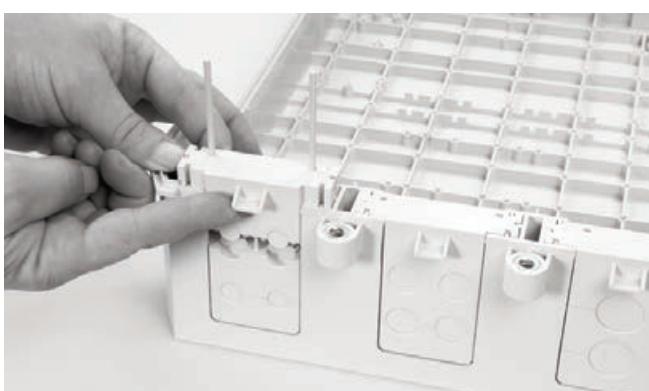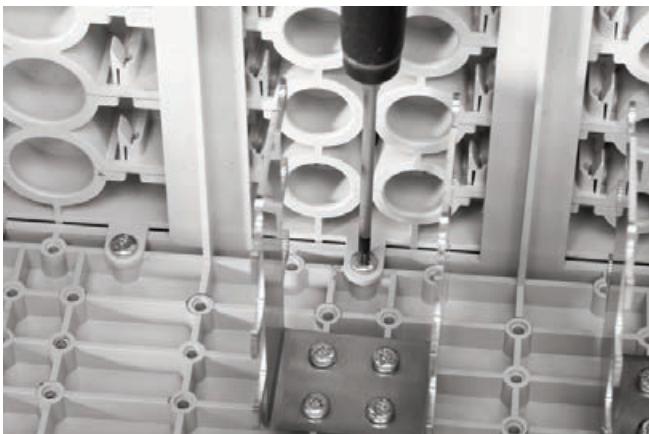

1.2 Different wrap-around ports are available (including brackets). Use two guiding pins to open the ports. Secure the bottom part to the box with the screws.

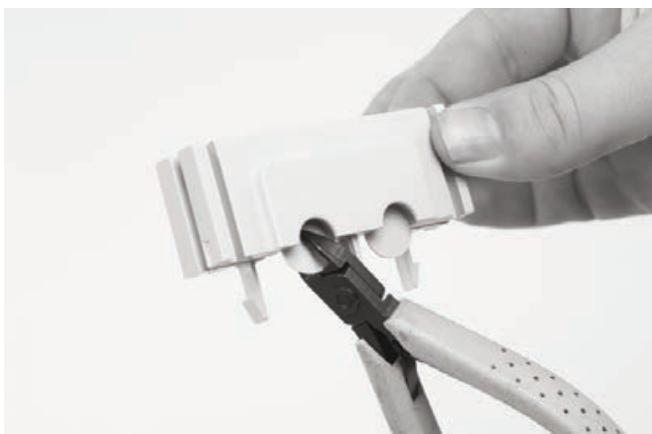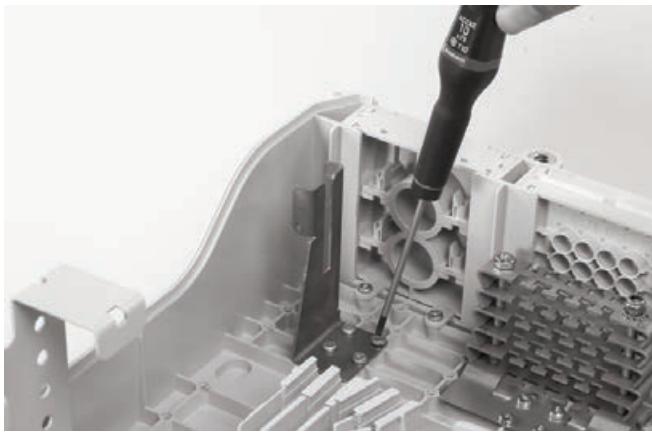

1.3 Install the cable bracket depending the cable seal...
Cut out plastic part, in case of installing a cable

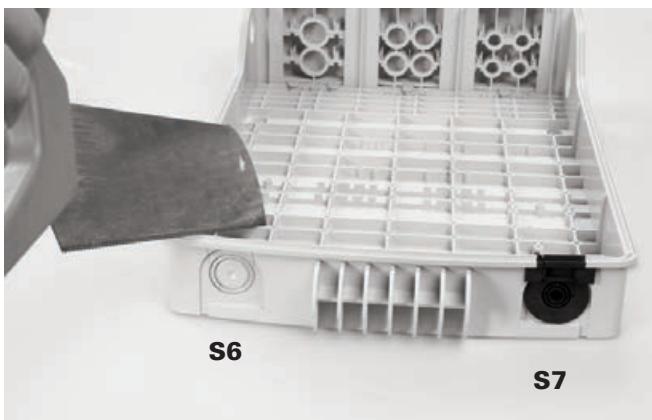


1.4 Use a hacksaw to reach the onion rings, which can be opened with a plier to open the in-line ports (S6/S7).





- 1.5 Install the wrap-around rubber seal into the port.


2 Looped cable

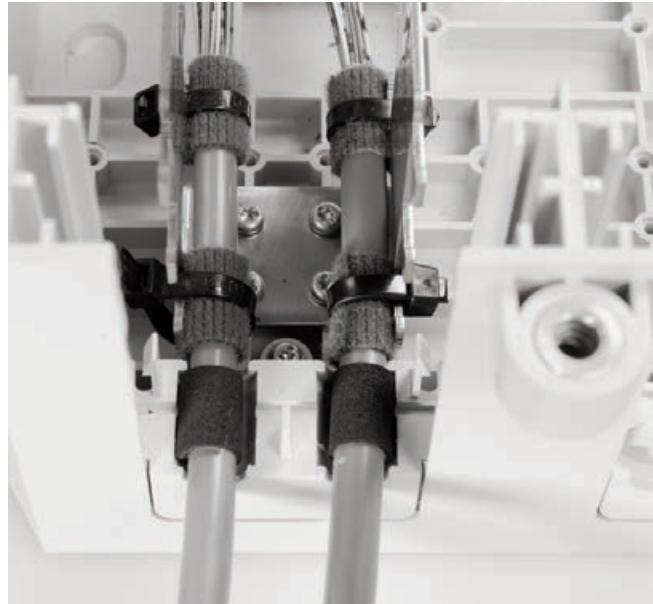




- 2.1 Cable installation into the wrap around ports. Bracket can be different depending on the port. Secure with hook and loop fastener tape and seal with foam (see length page 1).

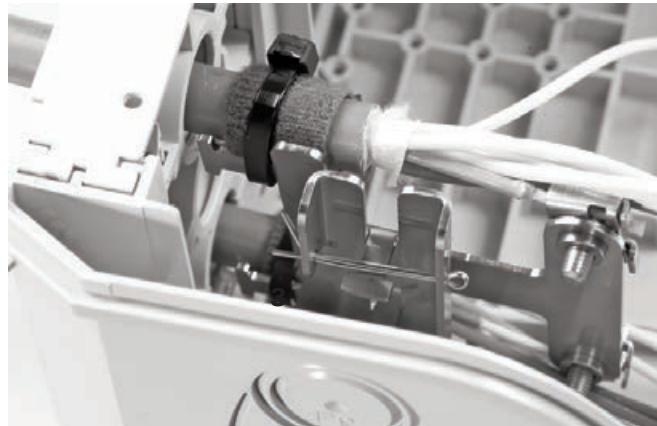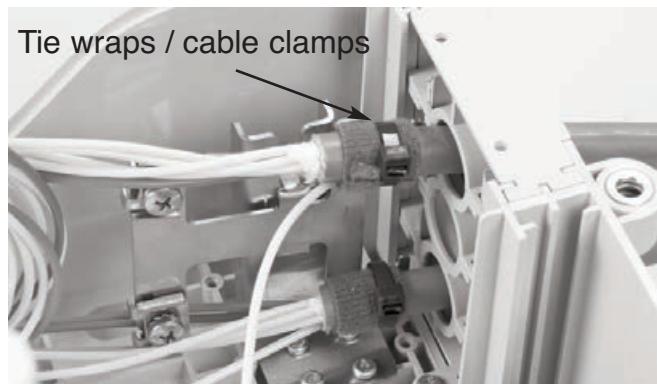



- 2.2 Install the bracket and terminate the looped cable. Take out the loose tube(s) from the basket for further use.

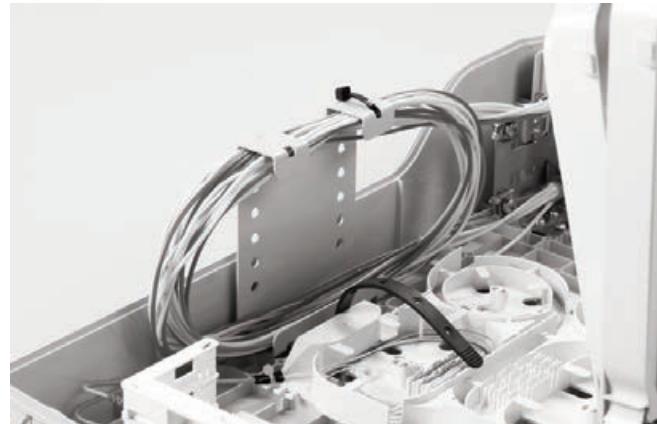

- 2.3 Store the looped tubes in the basket.

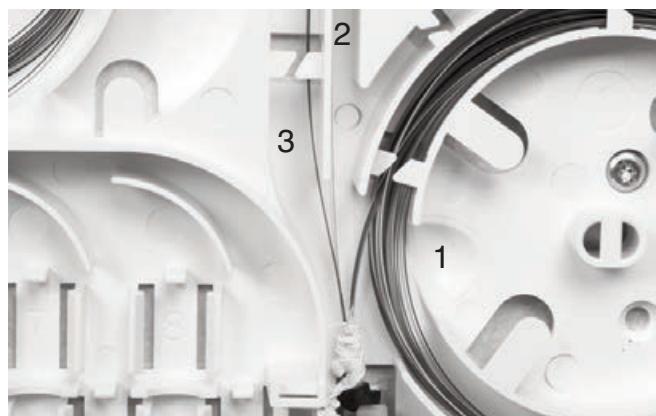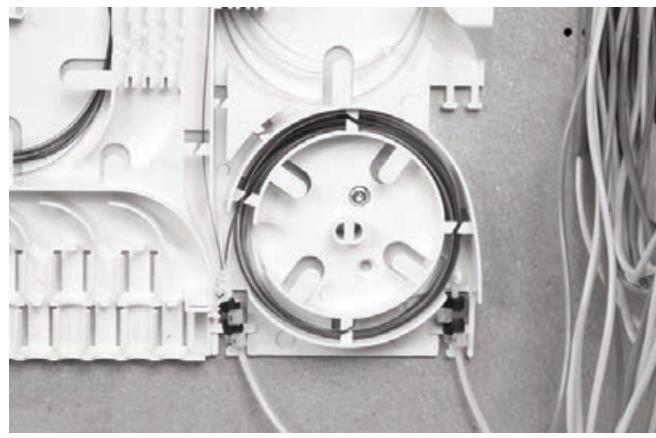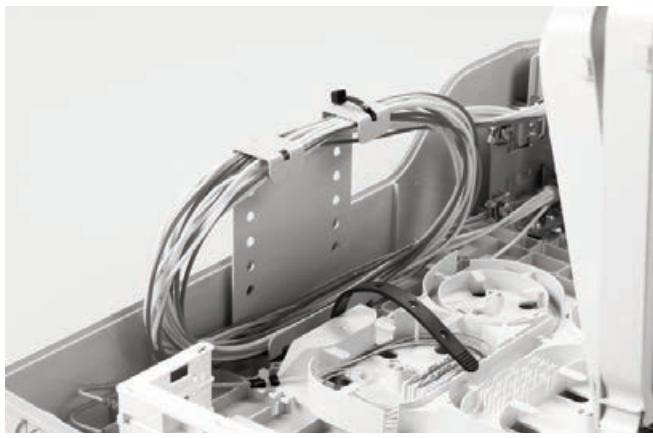


2.4 Route the loose tubes to the base tray. Mark left and right side of the loose tube at their position on the base tray.

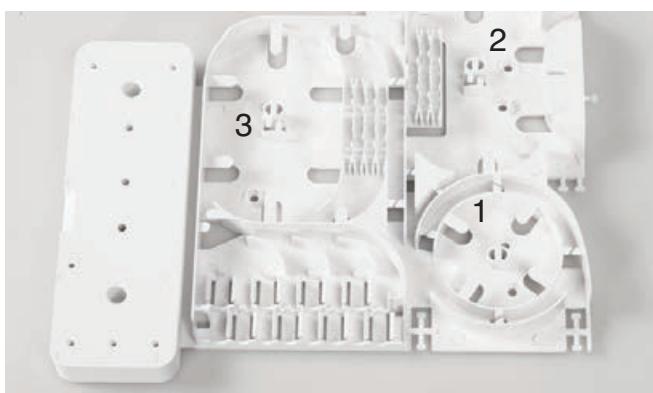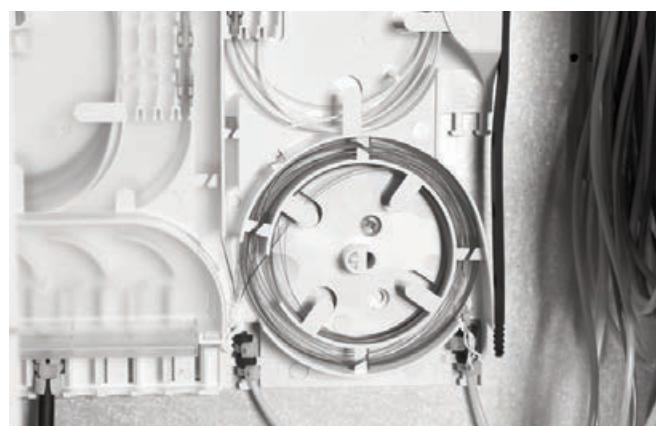


2.5 1: Storage area (looped storage shaved LT)
2: Splicing to splitter modules
3: Point-to-point applications

2.6 Store the unused looped fibers in the storage area.

2.7 Store the fibers which will be used later.

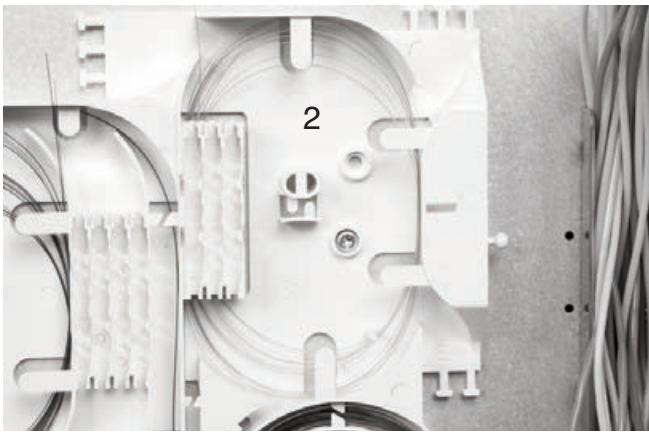


2.8 Store the fibers which will be spliced day 1 to the splitter modules.

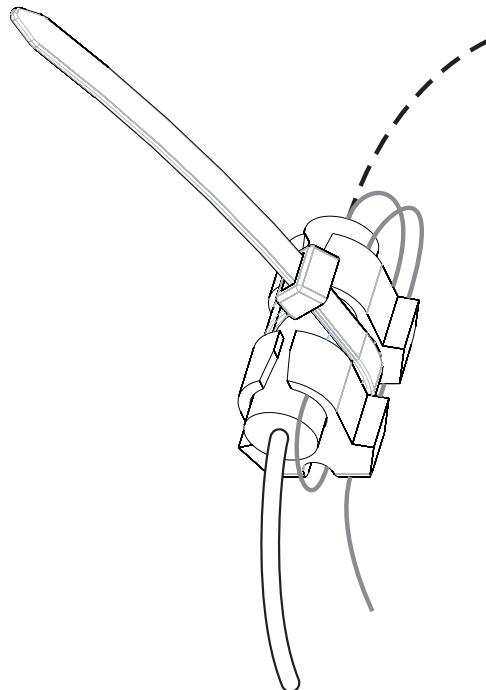

2.9 Store the fibers which will be spliced day 1 for the point-to-point applications.

3.3 Wrap one layer of foam (20 mm) on the securing position if needed. Terminate the aramid strength member by securing the cable/pigtail onto the bracket with tie-wrap. Depending the amount of aramid strength member, it needs to be wrapped twice around the bracket.

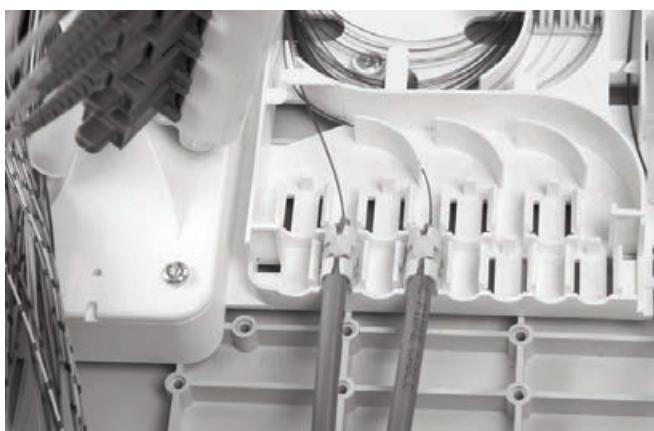

3 Drop cables (point-to-point applications)




3.1 Install the drop cable seal and push through the drop cable.

3.2 Remove the outer jacket over a distance of 1.2 m.


3.4 Install the terminated drop cable in the numbered ports on the base tray.

4 Splitters

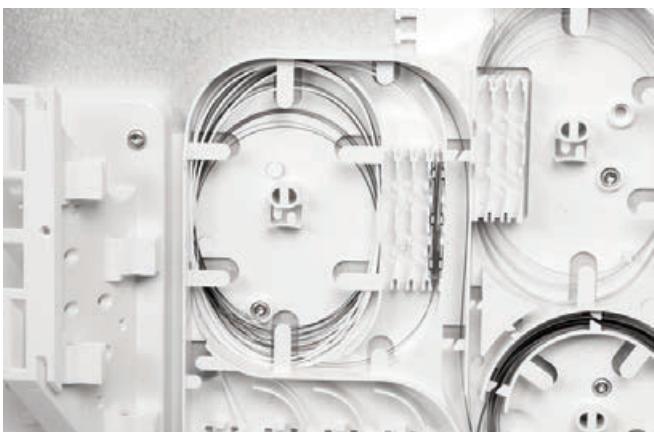

4.1 Install the splitter holder

3.5 Splice the fibers from the drop cable to the fibers from the looped cable. In case of SMOUV, use the insert.

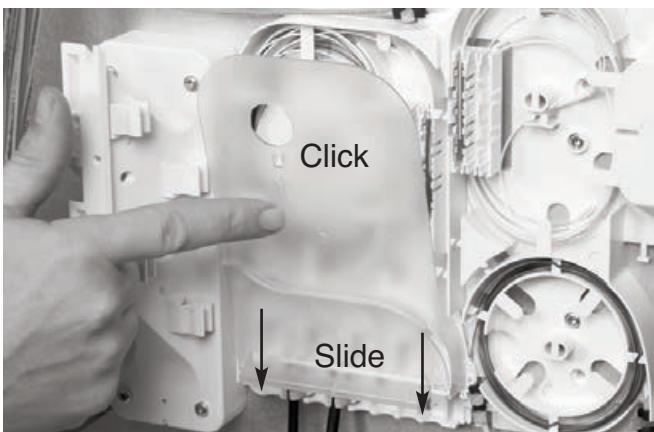


3.6 Install the cover onto the tray.



OCM6 butt





OCM6 in-line

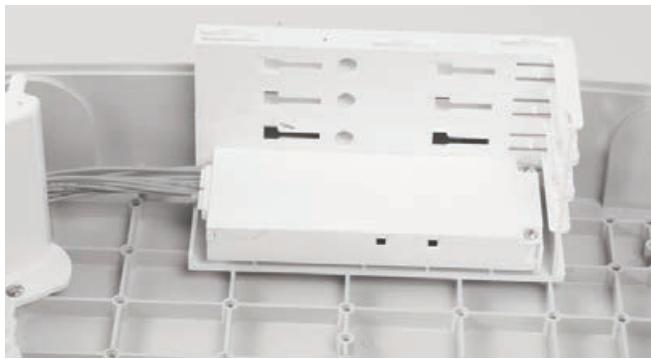

4.2 Install the splitter into the holder and route the pigtails via the bend control.

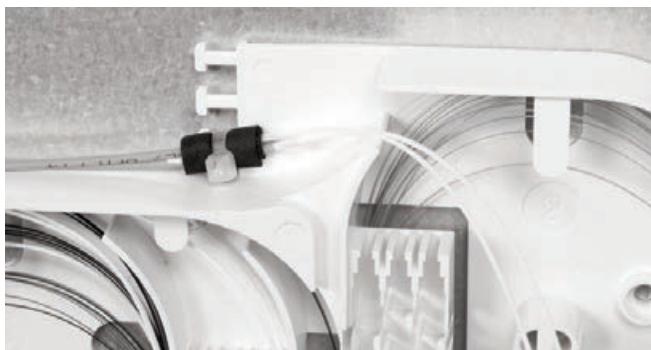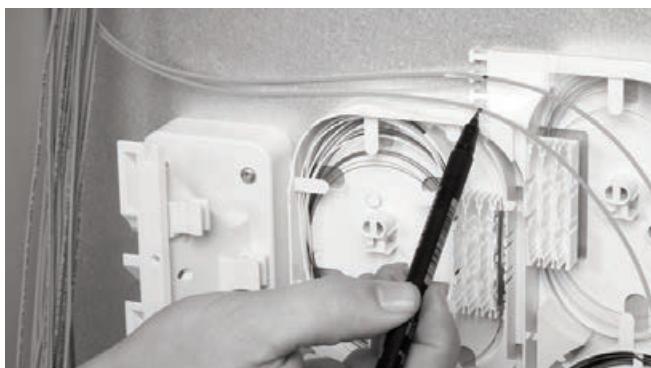


4.3 Route the incoming pigtails of the splitter (marked with red flag) to the base tray (area nr. 2). Remove the outer jacket from the mark over a distance of 1.2m. Secure with foam and tie-wrap onto the base tray.

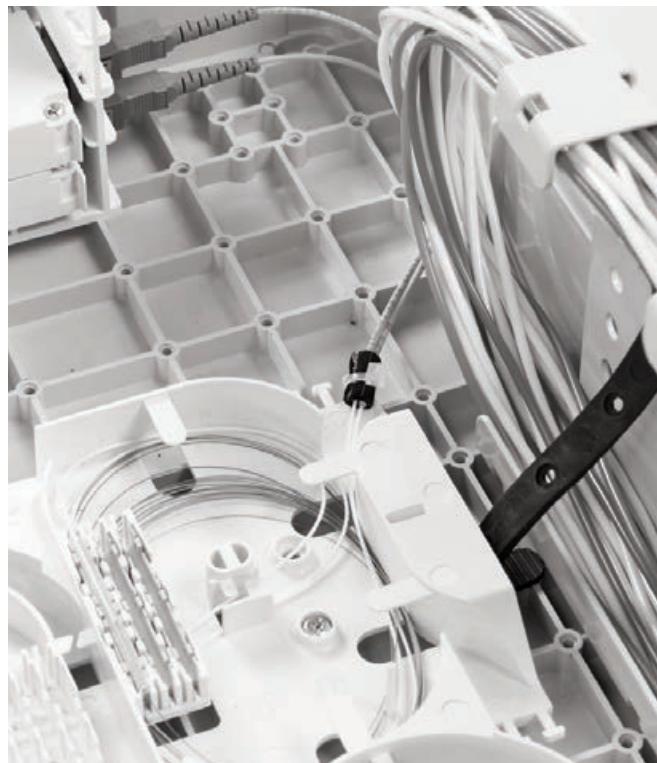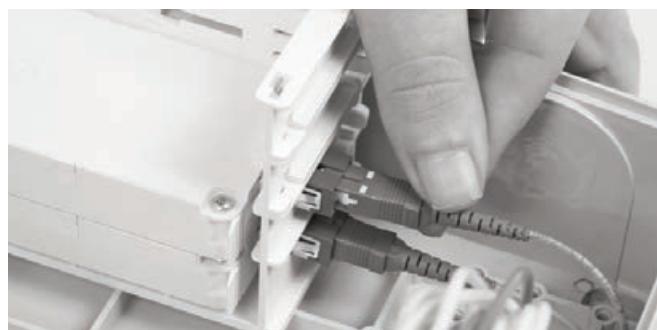


4.4 **In case of splitter modules with integrated adaptors for the incoming signal.** Insert the connector of the pigtail in the adaptor of the splitter and route the pigtail to the base tray. Remove the outer jacket over a distance of 1.2 m and secure with foam and tie-wrap onto the base tray.



4.5 To release the splitter module out of the splitter holder.


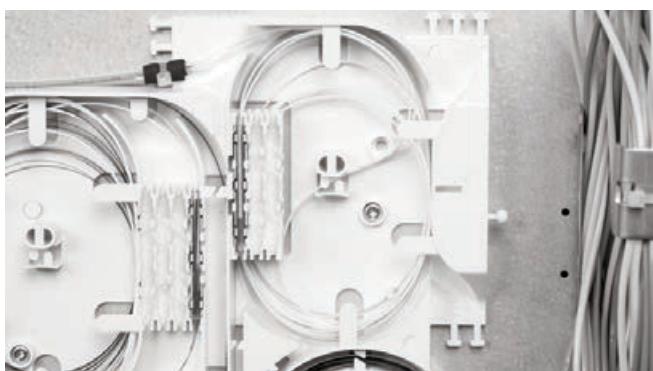


4.6 Splice the incoming of the splitter to the fibers coming from the looped cable. In case of SMOUV, use the insert. Store the overlength in the tray.

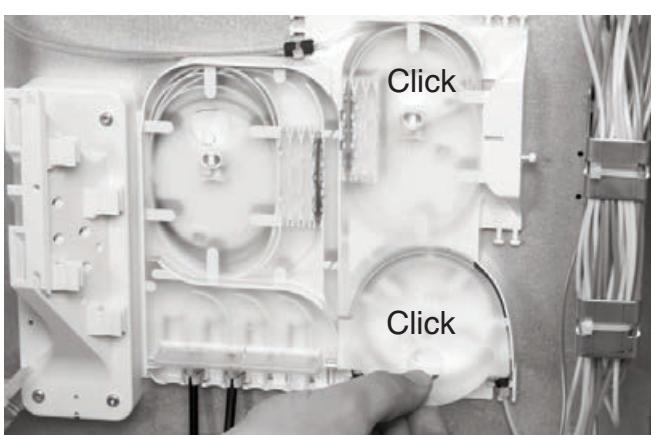


4.7 Install the cover onto the tray.

5 Patching trays

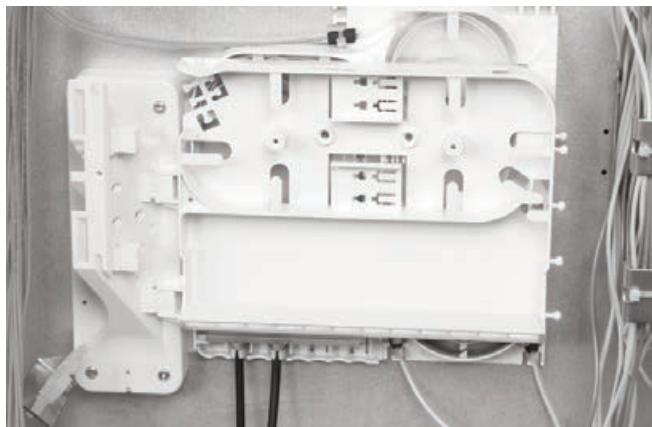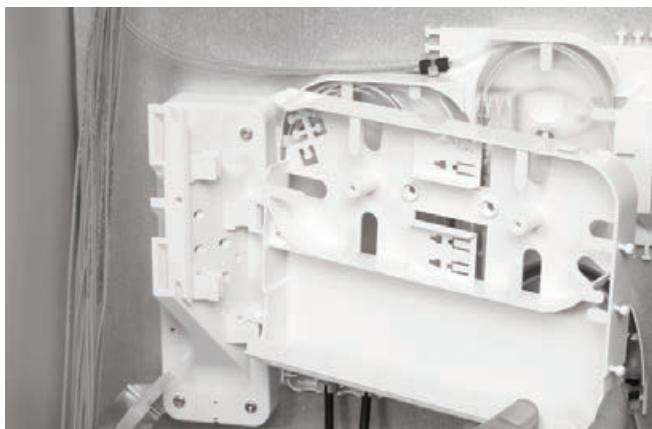

5.1 Install the patch tray onto the tower.

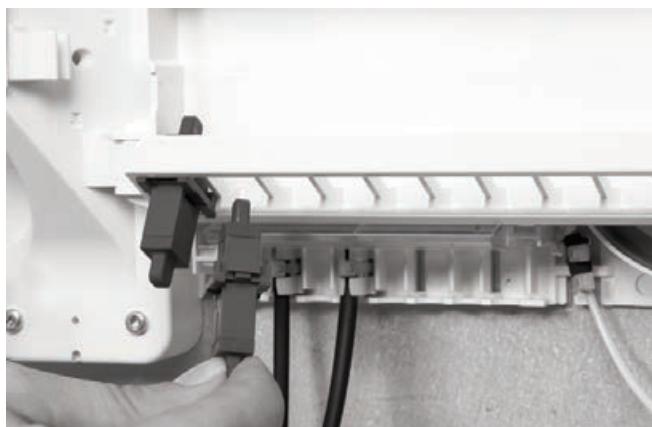


5.2 Insert the adaptor into the designated positions.



5.3 Install the drop seals and push the PICO cable through the seals. Remove the outer jacket over a length of 1.5 m. Secure the cable onto the bracket with foam and tie-wraps.



5.6 Install the foam at the position on the patch tray and secure with 2 tie-wraps as shown on the picture.

Mini-PICO (no connectors)

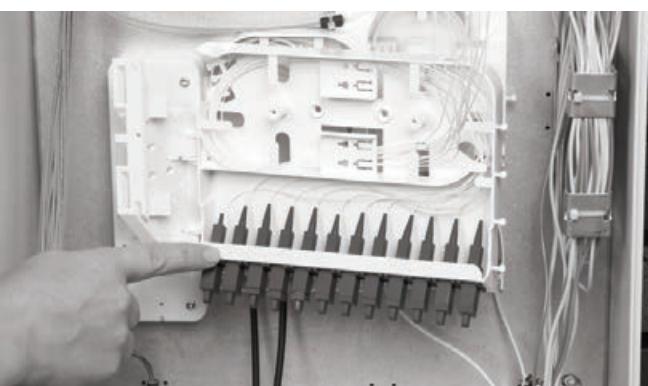


5.4 Install the pigtails and store the overlength in the splice area.

5.7 Install the splice holders onto the patch tray.

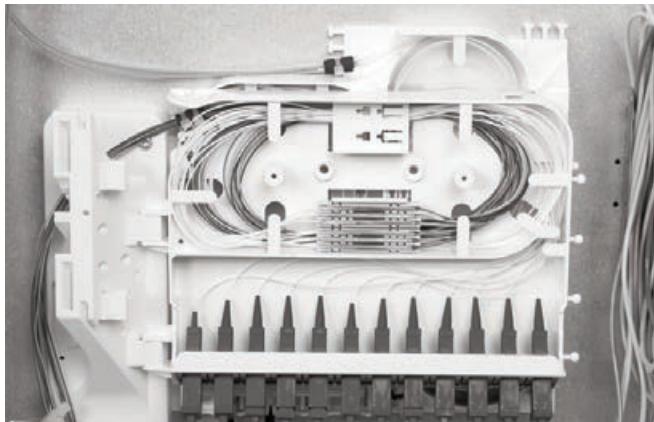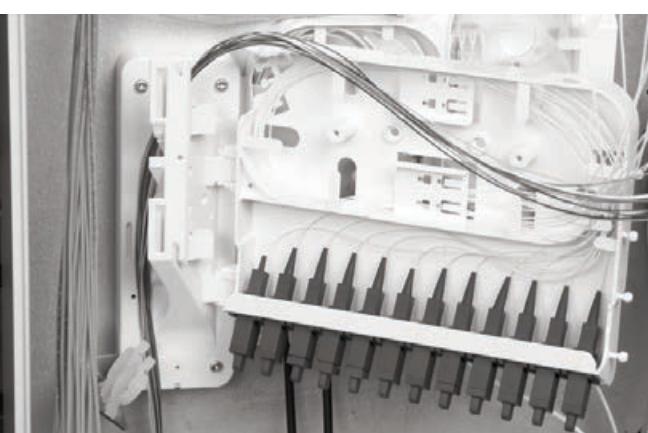

5.5 Route the MINI PICO fibers behind the tower towards the patch tray.

5.8 Splice the MINI PICO fibers to the pigtails and store the overlength in the splice area. Check the orientation of both fibers to avoid crossings.

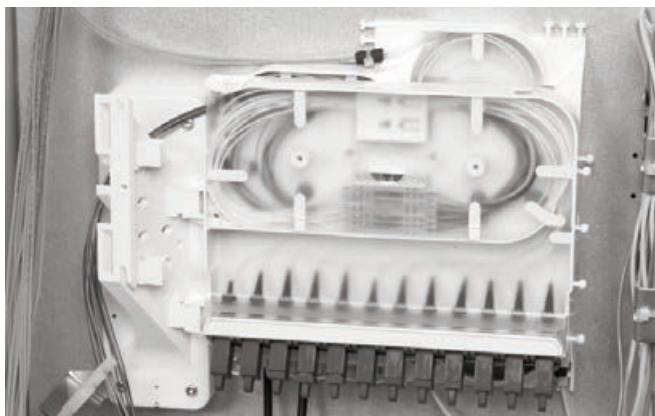


5.9 Install the cover onto the tray.

Mini-PICO (pre-connectorized)



5.10 In case of pre-connectorized MINI PICO cable, fibers are also routed behind the tower and secured with foam and tie-wraps onto the tray.

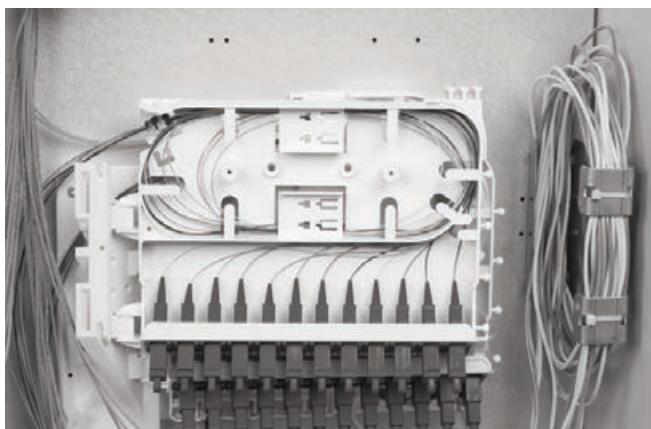


5.11 Store the overlength of the MINI PICO fibers in the splice area.

6 Routing pigtails from the splitter



6.1 Route the pigtails through the bend control towards the patch trays. Hook and loop fastener can be used to keep them bundled.

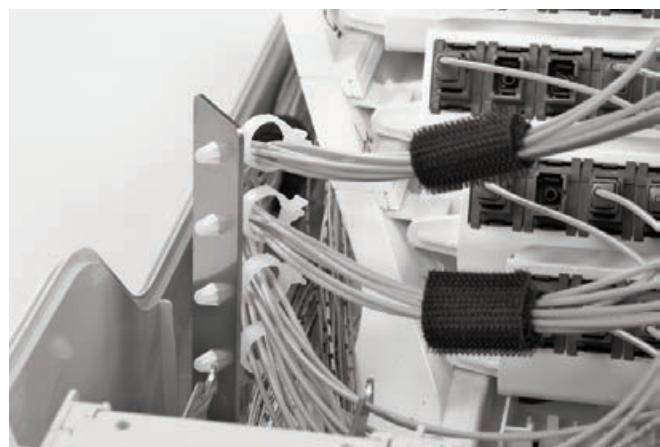

6.2 Route the pigtails through the cable clips for pigtail management. Again hook and loop fastener can be used to keep them in a bundle.




6.3 Install the cover onto the patch tray.



6.4 Secure the patch trays with the rubber flex part, as shown.



6.5 Parkin place for pigtails from the splitter which are not used day 1.

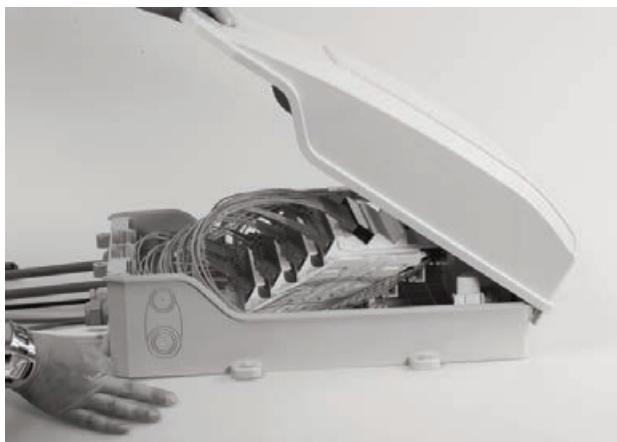

6.6 Close the box.

Tyco Electronics Raychem bvba

Dieststeenweg 692
B-3010 Kessel-Lo, Belgium
Tel.: 32-16-351 011
Fax: 32-16-351 697
www.te.com
www.telecomnetworks.com

SMOUV, TE (logo) and TE Connectivity are trademarks of the TE Connectivity group of companies and its licensors.

While TE Connectivity and its affiliates referenced herein have made every reasonable effort to ensure the accuracy of the information contained in this catalog, TE Connectivity cannot assure that this information is error free. For this reason, TE Connectivity does not make any representation or offer any guarantee that such information is accurate, correct, reliable or current. TE Connectivity reserves the right to make any adjustments to the information at any time. TE Connectivity expressly disclaims any implied warranty regarding the information contained herein, including, but not limited to, the implied warranties of merchantability or fitness for a particular purpose. TE Connectivity's only obligations are those stated in TE Connectivity's Standard Terms and Conditions of Sale. TE Connectivity will in no case be liable for any incidental, indirect or consequential damages arising from or in connection with, including, but not limited to, the sale, resale, use or misuse of its products. Users should rely on their own judgment to evaluate the suitability of a product for a certain purpose and test each product for its intended application.