

# HFTP

## Customer premises wall outlet


The HFTP is a compact fiber wall outlet for use at the final fiber termination point in the customer premises.

The HFTP provides mechanical protection and managed fiber control in an attractive format suitable for use inside customer premises. A variety of possible fiber termination techniques are accommodated.

- Splicing to factory terminated pigtails
- Positive fiber management
- Direct termination with field installable connectors
- Attractive design for indoor use
- Can hold up to 4 mechanical splices (RECORDsplice) and fusion splice protectors (SMOUV and ANT) and mechanical SC connectors can be integrated as well
- Splice cable to cable
- Compatible with 2 SC Simplex adaptors
- Multiple cable entry points (cable diameter  $\leq 6\text{mm}$ )
- Can be wall mounted and mounted on wall boxes with fixation points of 60mm
- Laser safe with individual shutters

home - **EnLighten**  
FTTH Solutions

## Dimensions

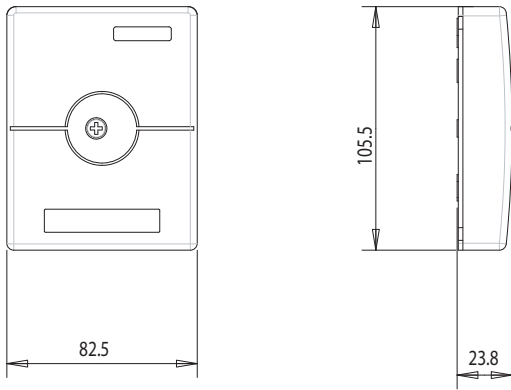

## Ordering information

**HFTP - N 0 - XX XX - E**

### Connector type

<b>S1</b> SC/UPC	<b>L1</b> LC/UPC
<b>S2</b> SC/APC	<b>L2</b> LC/APC
<b>NN</b> None for cable splicing	<b>LN</b> No pigtails and adaptors but with LC shutters

### Number of pigtails

0  
1  
2  
4 (LC only)

### Mounting kit

**E** Expansion screws

### Number of adapters

0  
1  
2

## Accessories

CPWO-LABEL-(1000) Access screw cover and security label (MOQ/SPQ = 1000 pcs)

### Note

HFTP-N0-NN00-E and HFTP-N0-LN00-E have an MOQ of 10 pcs  
All other items have an MOQ = SPQ = 300 pcs  
Packaging: 10 pieces per box

For more technical options and order quantity information, please consult the products ordering guides or your local sales representative.

SMOUV, RECORDsplice, TE (logo) and TE Connectivity are trademarks of the TE Connectivity group of companies and its licensors.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

Tyco Electronics Raychem bvba  
Diestsesteenweg 692  
3010 Kessel-Lo, Belgium  
Tel 32-16 351 011 (USA)1-919-557-8900  
Fax 32-16 351 697 (USA)1-919-557-8498  
www.te.com  
www.telecomnetworks.com  
TC 1061/DS/5 09/11

