




FCTS/FCWS

Flange Protection Product

Heat-shrinkable sleeve providing strong moisture-proof seal between flange & pipe

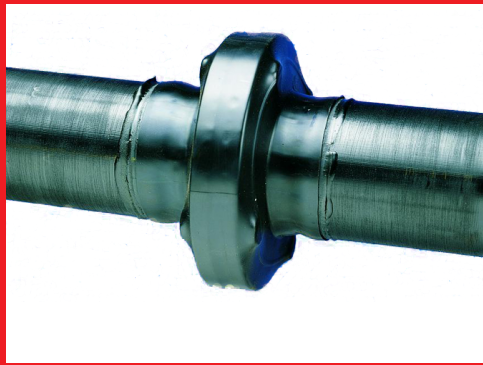

Market	Application	Temperature Range	Performance
Oil and Gas Pipelines Pipeline Rehabilitation Offshore Pipelines	Mechanical and flange couplers.	up to 30°C (86°F)	EN12068

System Description

Construction: Two-layer system

First layer:

Visco-elastic sealant.

Second layer:

Thick-walled, radiation-cross-linked, high density polyethylene.

FCTS/FCWS are available in a variety of flange sizes. Both products eliminate the need for molding and filling compounds or jellies. The visco-elastic properties of adhesives in the installed product protect against pipe stresses caused by ground movement. The wall thickness of the installed product offers additional mechanical strength in the critical transition area. The design of FCTS/FCWS flange protection products keeps nuts and bolts free from foreign substances (such as mastics), allowing easy re-entry and disassembly when necessary. FCTS/FCWS are installed using standard gas torches. Both sleeves can be placed directly onto the cleaned and prepared pipe and flange surface after preheating. FCTS: the

tubular sleeve is to be slid over the pipe before assembling the flanges. FCWS: the wraparound sleeve.

For pipe sizes above DN150, a heat-activated, pre-attached closure is used to bond the sleeve ends together. In addition, a corrugated cardboard support sheet adds structural support in the transition area, keeping nuts and bolts free from adhesive. During recovery, the adhesive softens and flows forming a tight bond. The bond strength builds up during cool-down, forming a moisture-proof seal that is mechanically strong and resistant to vibration, impact, abrasion and corrosive gases & fluids.

DS-FCTS-FCWS-REV5-AUG12-AARFS-0463

Product Advantages

- **No primer required**
No drying time and easy application.
- **Low preheat sensitivity & proven functionality**
Easy to apply. Saves time.
- **High impact and penetration resistance**
Tough, but flexible.
- **High shrink force backing**
Easy & clean installation even at the difficult step-down area.
- **Specially formulated sealant**
Ensures a strong bond & reliable protection.
- **Sealing adhesive automatically flows and repairs minor**
"Self-healing effect." Saves time.
- **No special equipment or skills required**
Makes installation fast and easy. Keeps installation costs low.

Product Selection Guide

- **Max operating temperature:**
30°C (86°F)
- **Compatible line coatings**
PE, PP, FBE, Coal Tar, Tape & Asphalt
- **Min preheat temperature**
60°C (140°F)
- **Recommended pipe preparation**
ST3
- **Soil stress restrictions**
None

Product Construction

	FCTS (tubular system)	FCWS (patch closure system)
• Backing (as supplied)	0.4-0.6 mm* (0.02-0.23")	0.7 mm (0.02")
• Backing (fully free recovered)	1.8 mm (0.07")	1.4 mm (0.05")
• Adhesive (as supplied)	1.0 mm (0.04")	1.5 mm (0.06")

* depending on the product size

Product Properties

Properties	Test Method	Typical Value
Backing		
Tensile strength	ISO R527	3300 psi (22.8 MPa)
Elongation	ISO R527	600%
Water absorption	ISO 62	0.05%
Adhesive		
Softening point	ASTM E-28	92°C (198°F)
Lap shear	EN12068 @ 10 mm (0.4")/min.	8 N/cm ²
Sleeve		
Peel to steel	EN12068 @ 10 mm (0.4")/min.	9 N/cm

Ordering Information

FCTS type products are available as a kit, containing:

- a support sheet
- a tubular sleeve

FCTS - DN 150

Pipe diameter	DN80/100, DN150, DN200
Product type	FCTS

FCWS type products are available as a kit, containing:

- a support sheet
- a wraparound sleeve, closed by a heat-activated closure (for pipe Ø above DN 150)

FCWS - DN 300 - 450

Sleeve width	450 mm, 600 mm
Pipe diameter	DN200 - DN 1000
Product type	FCWS

For proper selection of FCTS/FCWS size and kit content, see latest application table AT-FCTS-FCWS.



CORROSION PROTECTION GROUP
www.berrycpg.com

Headquarters

Franklin, MA, USA
 Tel: +1 508 918 1714
 US Toll Free: +1 800 248 0149
 Fax: +1 508 918 1910
CPG@berryplastics.com

Houston, TX, USA
 Tel: +1 713 676 0085
 US Toll Free: +1 888 676 7202
 Fax: +1 713 676 0086
CPGH@berryplastics.com

Tijuana, Mexico
 Tel USA +1 858 633 9797
 Fax US: +1 858 633 9740
 Tel Mexico: +52 664 647 4397
 Fax Mexico: +52 664 607 9105
CPGTJ@berryplastics.com

Westerlo, Belgium
 Tel, +32 14 722500
 Fax +32 14 722570
CPGE@berryplastics.com

Baroda, India
 Tel: +91 2667 264721
 Fax: +91 2667 264724
CPGIN@berryplastics.com

The leading global partner in protecting the integrity of critical infrastructure.

Berry Plastics warrants that the product(s) represented within conform(s) to its/their chemical and physical description and is appropriate for the use as stated on the respective technical data sheet when used in compliance with Berry Plastics written instructions. Since many installation factors are beyond the control of Berry Plastics, the user is obligated to determine the suitability of the products for the intended use and assume all risks and liabilities in connection herewith. Berry Plastics liability is stated in the standard terms and conditions of sale. Berry Plastics makes no other warranty either expressed or implied. All information contained in the respective technical data sheet(s) should be used as a guide and is subject to change without notice. This document supersedes all previous revisions. Please see revision date on the right.

The information and values listed for Berry Plastics products are averages obtained from the relevant industry test procedures, carried out in our laboratories under controlled conditions. Values obtained on site will vary depending on the test methods and conditions. Manufacturing tolerances are available on request. Whilst Berry Plastics warrants its products to be free of material and manufacturing defects, Berry Plastics disclaims any liability in connection with the misuse of Berry Plastics products.

Local Distributor / Representative:

For contact details of local Distributors / Representatives
 Please visit: www.berrycpg.com