


FCWS-F Flangeseal (US)

Heat shrinkable corrosion protection sleeve specifically developed for installation on flanges or mechanical couplings that are already in place.

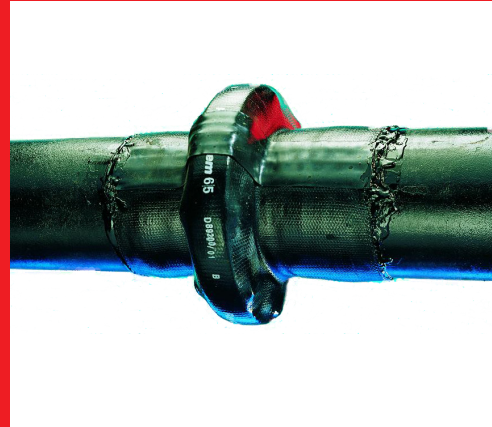

Market	Application	Temperature Range	Performance
Oil and Gas Pipelines Pipeline Rehabilitation Offshore Pipelines	Mechanical and flange couplers.	up to 30°C (86°F)	EN12068

System Description

FCWS-F/Flangeseal (US) flange/ pipe sealing and protection.

Construction:

Two-layer system

First layer:

Visco-elastic sealant.

Second layer:

Fiberglass reinforced, radiation cross-linked, polyethylene backing.

The FCWS-F/Flangeseal (US) - is a wrap-around heat-shrinkable sleeve, with a specially designed zipper closing system, allowing a fast and simple installation. The fiberglass-reinforced woven backing gives the FCWS-F/Flangeseal (US) a high mechanical resistance as well as a high recovery capacity. In addition to the sleeve, a cardboard sheet is supplied to keep the flange nuts & bolts clean, allowing easy re-entry and disassembly when necessary. FCWS-F/Flangeseal (US) is installed using standard gas torches. The installation is

carried out directly on the cleaned and prepared pipe surface and flange. After preheating, the corrugated cardboard sheet is wrapped around the flange to be sealed. The heat-shrinkable sleeve is positioned centrally over the flange and closed, using the zipper closure. When heated above 125°C (257°F), the sleeve shrinks tightly around the substrate. During recovery, the adhesive softens and flows to form a tight bond. The bond strength builds up during cool down and is fully retained after completion of the job.

Product Advantages

- **Backing with integrated fiberglass reinforcement**
Tough and long lasting.
Provides a high recovery capacity.
- **65% shrinkage ratio – conforms to high transitions**
Reduces inventory & logistics costs. Saves money
- **High mechanical resistance backing**
Resists abrasion, impact and penetration.
- **No primer required**
No drying time and easy application.
- **Specially formulated sealant**
Ensures a strong bond & tight seal to virtually any substrate.
Maintains its elasticity and sealing characteristics over a wide temperature range.
- **Sealing adhesive automatically flows and repairs minor mechanical damages**
"Self-healing effect." Saves money.
- **Low preheat sensitivity & proven functionality**
Faster application, this saving time.
- **Zipper closure system**
Simple & fast installation.
- **No special equipment required**
Makes installation fast and easy.
Keeps installation costs low.

Product Selection Guide

- **Max operating temperature:**
30°C (86°F)
- **Compatible line coatings**
PE, PP, FBE, Coal Tar, Tape, Asphalt & Plastics
- **Min preheat temperature**
60°C (140°F)
- **Recommended pipe preparation**
ST3

Product Construction

	FCWS-F / Flangeseal (US)
• Backing (as supplied)	1.30 mm (0.051")
• Backing (fully free recovered)	3.25 mm (0.128")
• Adhesive (as supplied)	1.20 mm (0.047")

Product Properties

Properties	Test Method	Typical Value
Backing		
Bursting strength	DIN 30672	3500 N
Adhesive		
Softening point	ASTM E-28	92°C (198°F)
Shear strength	EN12068 @ 10 mm (0.4") /min.	8 N/cm ²
Sleeve		
Peel strength	EN12068 @ 10 mm (0.4")/min.	9 N/cm

Ordering Information

FCWS-F/Flangeseal (US) type products are available as a kit containing:

- a sleeve (pre-cut sleeve with zipper closure)
- a corrugated cardboard sheet

FCWS - F - DN 65 - 300

Sleeve width	300 mm (12")
Pipe diameter	DN50, DN65, DN80, DN100, DN125, DN150 (2.375", 2.875", 3.500", 4.500", 5.563", 6.625")

FS5563 - 24 (US only)

Sleeve width	24" (600 mm)
Pipe diameter	See application table

Max flange Ø (mm)	Min. Pipe Ø (mm)	FCWS-F	Flangeseal (US only)
141 (5.560")	73 (2.87")		FS5563-24
168 (6.620")	89 (3.50")		FS6625-24
170 (6.690")	60 (2.36")	FCWS-F-DN50-300	
185 (7.280")	76 (3.0")	FCWS-F-DN65-300	
200 (7.870")	89 (3.50")	FCWS-F-DN80-300	
219 (8.625")	102 (4.0")		FS8625-24
230 (9.060")	114 (4.50")	FCWS-F-DN100-300	FS10750-24
250 (9.840")	140 (5.50")	FCWS-F-DN125-300	FS10750-24
285 (11.22")	168 (6.62")	FCWS-F-DN150-300	FS12750-24
355 (14.00")	168 (6.62")	*see FCWS or TISW-F	FS14000-24
			Bigger sizes available, up to 48000



CORROSION PROTECTION GROUP
www.berrycpg.com

Headquarters

Franklin, MA, USA
Tel: +1 508 918 1714
US Toll Free: +1 800 248 0149
Fax: +1 508 918 1910
CPG@berryplastics.com

The leading global partner in protecting the integrity of critical infrastructure.

Berry Plastics warrants that the product(s) represented within conform(s) to its/their chemical and physical description and is appropriate for the use as stated on the respective technical data sheet when used in compliance with Berry Plastics written instructions. Since many installation factors are beyond the control of Berry Plastics, the user is obligated to determine the suitability of the products for the intended use and assume all risks and liabilities in connection herewith. Berry Plastics liability is stated in the standard terms and conditions of sale. Berry Plastics makes no other warranty either expressed or implied. All information contained in the respective technical data sheet(s) should be used as a guide and is subject to change without notice. This document supersedes all previous revisions. Please see revision date on the right.

The information and values listed for Berry Plastics products are averages obtained from the relevant industry test procedures, carried out in our laboratories under controlled conditions. Values obtained on site will vary depending on the test methods and conditions. Manufacturing tolerances are available on request. Whilst Berry Plastics warrants its products to be free of material and manufacturing defects, Berry Plastics disclaims any liability in connection with the misuse of Berry Plastics products.

Houston, TX, USA
Tel: +1 713 676 0085
US Toll Free: +1 888 676 7202
Fax: +1 713 676 0086
CPGH@berryplastics.com

Tijuana, Mexico
Tel USA +1 858 633 9797
Fax US: +1 858 633 9740
Tel Mexico: +52 664 647 4397
Fax Mexico: +52 664 607 9105
CPGTJ@berryplastics.com

Westerlo, Belgium
Tel, +32 14 722500
Fax +32 14 722570
CPGE@berryplastics.com

Baroda, India
Tel, +91 2667 264721
Fax: +91 2667 264724
CPGIN@berryplastics.com

Local Distributor / Representative:

For contact details of local Distributors / Representatives
Please visit: www.berrycpg.com