


## 2 Fibers Multi Mode Breakout | 7.0mm

### Properties


LC Connector Compliance	IEC 61754-20, TIA 604-10-A, RoHS
SC Connector Compliance	IEC 61754-4, TIA 604-3, RoHS
Fiber Count	2 Fibers
Cable Diameter	7.0mm
Subunit Diameter	2.0mm
Alignment Technology	Full ceramic ferrule (Zirconia ZrO2)
Operating Temperature	-40°C to +85°C
Flammability	UL94 V-0
Durability	>1000 mating cycles
Transmission with Applied	GR-326 CORE 4.4.3.5
Tensile Load	
Insertion Loss: IEC 61300-3-4-MB	Multimode: ≤ 0.40dB
Return Loss: IEC 61300-3-6-MB	Multimode: ≥ 40dB
Connector End Face Geometry	IEC 61755-3



Metal Corugated Diameter (V1 Model): 2.85mm  
 Normal Tube Diameter (V0 Model): 2.00 mm



Cable Diameter: 7.0mm  
 Subunit Diameter: 2.0mm

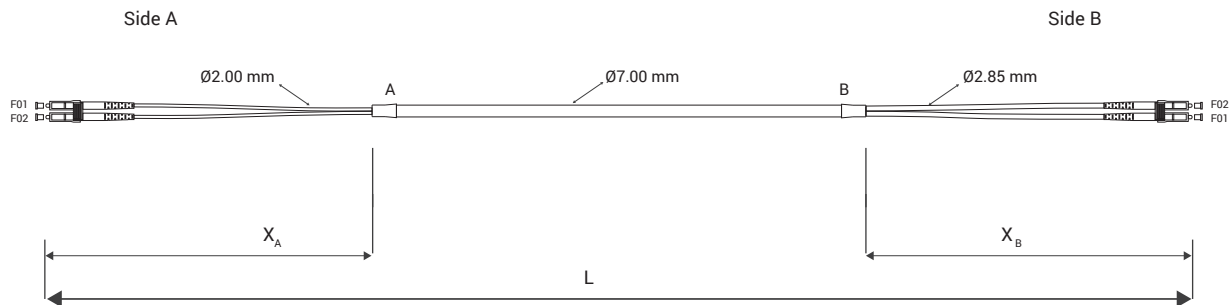

\* X (Tube Length) is standard 500mm. Please contact us for different tube length.

Sample Coding

U - PC - 02 - BO - 070 - M3 - LC/V0 - LC/V1 - 005M

Type	Type	Fiber Count	Cable Type	Diameter	Fiber Type	1. Connector	2. Connector	Length						
Universal:	U	Patch Cord:	PC	2 Fibers:	02	Breakout:	BO	7.0mm:	070	MM G.651 OM3: M3 MM G.651 OM4: M4	1. Connector	2. Connector	Length	---M
											SC-UPC/V0: SC/V0 SC-UPC/V1: SC/V1 LC-UPC/V0: LC/V0 LC-UPC/V1: LC/V1	SC-UPC/V0: SC/V0 SC-UPC/V1: SC/V1 LC-UPC/V0: LC/V0 LC-UPC/V1: LC/V1		