


## MTP-Elite Single Mode Patch Cord

### Properties

MTP Connector Compliance	IEC 61754-7, TIA 604-5, RoHS
Base-8	8 Fibers
Base-12	12 Fibers
Base-24	24 Fibers
Cable Diameter	3.0mm
Operating Temperature	-10°C to +70°C
Flammability	UL94 V-0
Durability	> 100 mating cycles
Transmission with Applied Tensile Load	50 Newton
Insertion Loss: IEC 61300-3-4-MB	Average: 0,10dB, Max: 0,35dB
Return Loss: IEC 61300-3-6-MB	Singlemode: ≥ 60dB

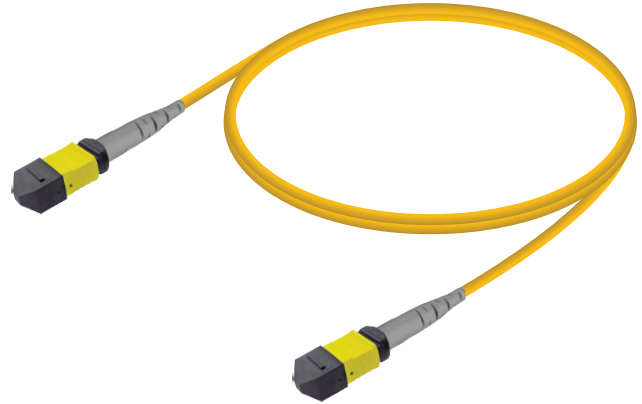


MTP-A2  
Base-8



MTP-A2  
Base-12



MTP-A2  
Base-24

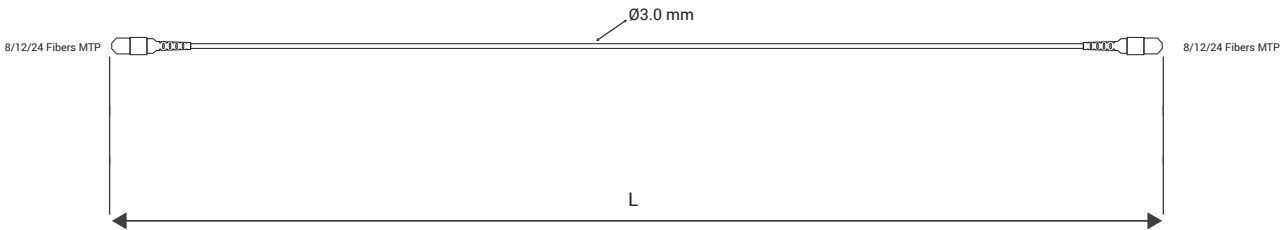

Sample Coding

I - PC - 08 - MT - 030 - A2 - B - MTPEf - MTPEf - 005M

Type	Type	Fiber Count	Cable Type	Diameter	Fiber Type	Polorization	1. Connector	2. Connector	Length
Indoor: I	Patch Cord: PC	8 Fibers: 08 12 Fibers: 12 24 Fibers: 24	MTP/MTP: MT	3.0mm: 030	SM G.657 A2: A2	A Polorization: A B Polorization: B	MTP-Female: MTPEf MTP-Male: MTPEm	MTP-Female: MTPEf MTP-Male: MTPEm	---M