


2 Fibers Single Mode Breakout | 7.0mm




Properties

LC Connector Compliance	IEC 61754-20, TIA 604-10-A, RoHS
SC Connector Compliance	IEC 61754-4, TIA 604-3, RoHS
Fiber Count	2 Fibers
Cable Diameter	7.0mm
Subunit Diameter	2.0mm
Alignment Technology	Full ceramic ferrule (Zirconia ZrO2)
Operating Temperature	-40°C to +85°C
Flammability	UL94 V-0
Durability	>1000 mating cycles
Transmission with Applied	GR-326 CORE 4.4.3.5
Tensile Load	
Insertion Loss: IEC 61300-3-4-MB	Single Mode ≤ 0.30 dB
Return Loss: IEC 61300-3-6-MB	Single Mode UPC ≥ 50 dB Single Mode APC ≥ 60 dB
Connector End Face Geometry	IEC 61755-3




Cable Diameter: 7.0mm

Subunit Diameter: 2.0mm

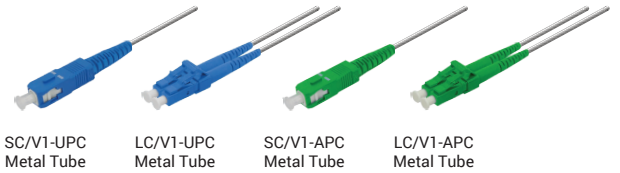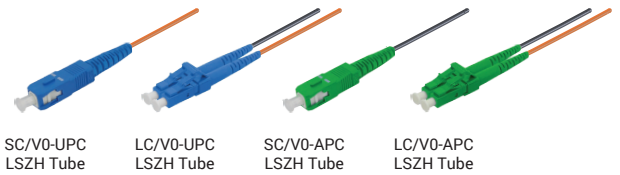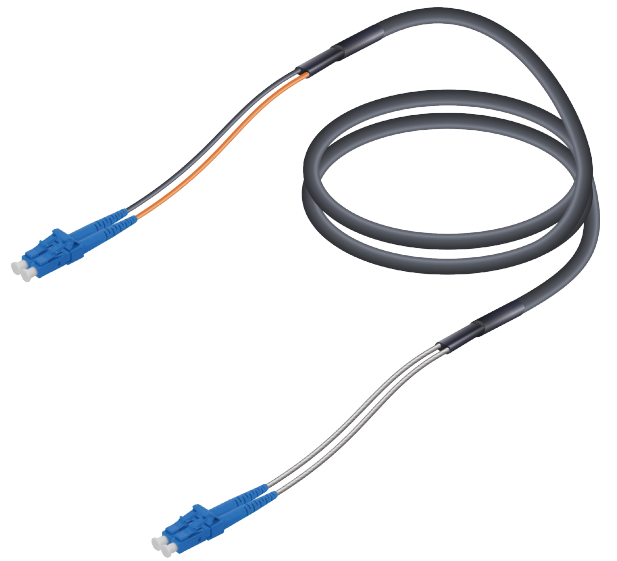

Metal Corrugated Diameter (V1 Model): 2.85mm
 Normal Tube Diameter (V0 Model): 2.00 mm

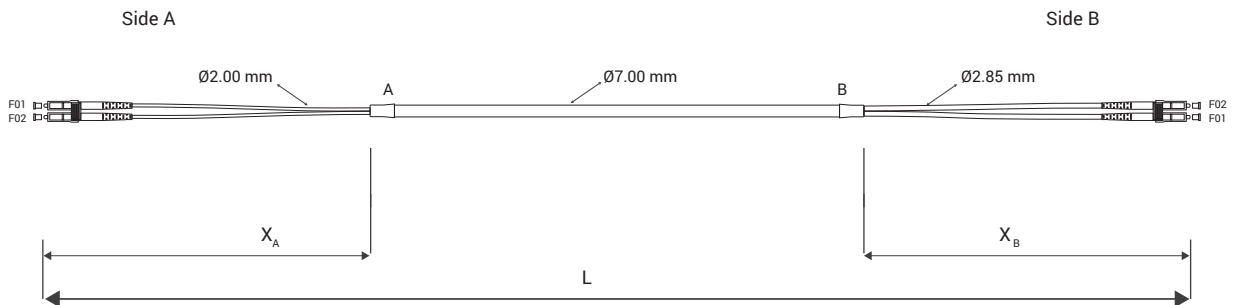

* X (Tube Length) is standard 500mm. Please contact us for different tube length.

Sample Coding

U - PC - 02 - BO - 070 - A2 - LC/V0 - LC/V1 - 005M

Type	Type	Fiber Count	Cable Type	Diameter	Fiber Type	1. Connector	2. Connector	Length
Universal: U	Patch Cord: PC	2 Fibers: 02	Breakout: BO	7.0mm: 070	SM G.657 A2: A2	SC-UPC/V0: SC/V0 SC-APC/V0: SA/V0 SC-UPC/V1: SC/V1 SC-APC/V1: SA/V1 LC-UPC/V0: LC/V0 LC-APC/V0: LA/V0 LC-UPC/V1: LC/V1 LC-APC/V1: LA/V1	SC-UPC/V0: SC/V0 SC-APC/V0: SA/V0 SC-UPC/V1: SC/V1 SC-APC/V1: SA/V1 LC-UPC/V0: LC/V0 LC-APC/V0: LA/V0 LC-UPC/V1: LC/V1 LC-APC/V1: LA/V1	---M