

## 288F Fiber Optic Splice Closures

Single Element Max: 24 Trays, 24x12 Fibers




### Features

- Modular capacity up to 288 fibers
- May be used for cut, uncut and taut sheath applications.
- May be used for all fiber optic cable.
- Sheath retention & central strength member fasten system included.
- Closure construction and lightweight plastic provides strength and resistance to chemical and U.V attack
- Installation and reentry with a minimum of tools
- All hardware are included
- Protection class: IP68
- RoHS compliance

### Application

Underground, Aerial, Vault, Pole Mounting and Wall Mountable

Single Element Tray | Thickness: 8mm  
12 Splices Capacity

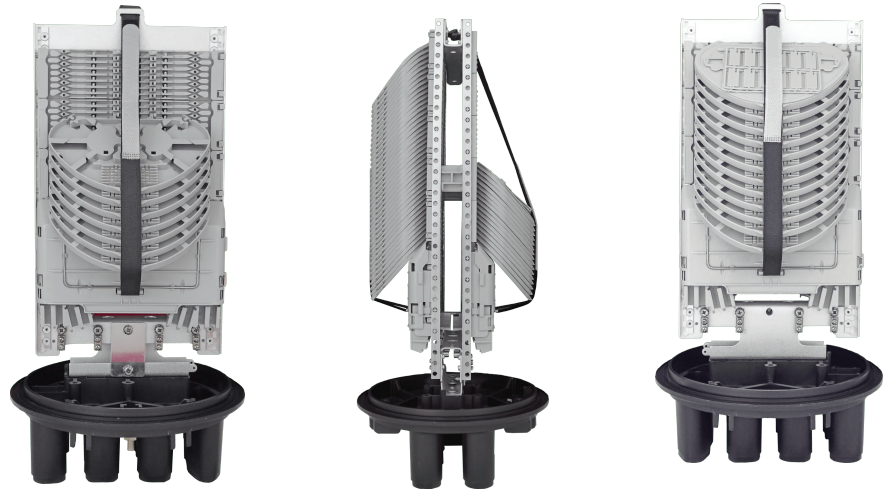

### Specifications

Model No.	YT01055   SSC-492250-6P-288-24T/24T-SE 492x265m, 288 Fibers Capacity, 24 Trays, 6 Port, Enclosure , w/o Mounting Kits
Model No.	YT00965   SSC-492250-6P-144-12T/24T-SE 492x265m, 144 Fibers Capacity, 12 Trays, 6 Port, Enclosure , w/o Mounting Kits
Model No.	YT01056   SSC-492250-6P-96-8T/24T-SE 492x265m, 96 Fibers Capacity, 8 Trays, 6 Port, Enclosure , w/o Mounting Kits
Spliced Fiber Storage Capacity	288 splices (24x12)
Size   Height x Diameter	492mm x 250mm (w/o clamp), 492mm x 300mm (w/ clamp)
Cable Ports	1 oval port (30mm), 6 round ports (30mm)
Mounting Kits	Wall Mounting Kit - 2 Pole Mounting Kit - 2
See Other Document	