

960F Fiber Optic Splice Closures


Single Circuit Max: 80 Trays, 80x12 Fibers

Features


- Modular capacity up to 960 fibers
- May be used for cut, uncut and taut sheath applications.
- May be used for all fiber optic cable.
- Sheath retention & central strength member fasten system included.
- Closure construction and lightweight plastic provides strength and resistance to chemical and U.V attack
- Installation and reentry with a minimum of tools
- All hardware are included
- Protection class: IP68
- RoHS compliance

Application

Underground, Aerial, Vault, Pole Mounting and Wall Mountable

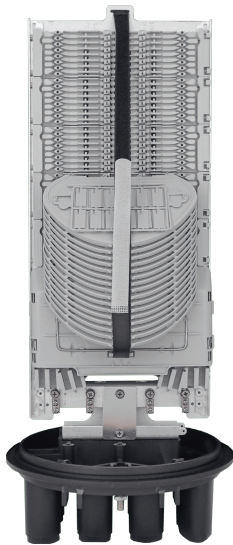

Single Circuit Tray | Thickness: 4mm  
12 Splices Capacity



Specifications

Model No.	YT01047   SSC-576250-6P-576-48T/80T-S12C 576x265m, 576 Fibers Capacity, 48 Trays, 6 Port, Enclosure , w/o Mounting Kits
Model No.	YT00966   SSC-576250-6P-288-24T/80T-S12C 576x265m, 288 Fibers Capacity, 24 Trays, 6 Port, Enclosure , w/o Mounting Kits
Model No.	YT01048   SSC-576250-6P-144-12T/80T-S12C 576x265m, 144 Fibers Capacity, 12 Trays, 6 Port, Enclosure , w/o Mounting Kits
Spliced Fiber Storage Capacity	960 splices (80x12)
Size   Height x Diameter	576mm x 250mm (w/o clamp), 576mm x 300mm (w/ clamp)
Cable Ports	1 oval port (30mm), 6 round ports (30mm)
Mounting Kits	Wall Mounting Kit - 2 Pole Mounting Kit - 2
See Other Document	