



snow & ice protection



Constant wattage heating cables



Self-regulating heating cables



Temperature controllers

solutions
for everyone



Protection of roofs, gutters and downpipes



Snow and ice protection systems protect against:

- snow and ice build-up on roofs,
- damage caused by ice build-up in gutters and downpipes,
- unsightly water damage on building walls,
- icicle formation.



For protecting roofs and their elements, heating cables with UV-resistant outer sheath need to be applied:

- ELEKTRA VCDR heating cables,
- ELEKTRA TuffTec™ heating cables,
- ELEKTRA SelfTec® and SelfTec® PRO20 self-regulating heating cables.



Protective solutions for winter conditions

ELEKTRA VCDR heating cables are characterized by constant power output value of 20 W/m, the output value for the TuffTec™ is 30 W/m. They are offered for sale in ready-made units terminated with a power supply conductor (the so called "cold tail"). When designing your heating system, account for the available cable lengths.

Thanks to their exceptionally high resistance against damaging influence of any bituminous substances, ELEKTRA TuffTec™ heating cables are ideally suited for the purposes of heating roofs covered with roof felt or bituminous shingles.

ELEKTRA SelfTec® self-regulating heating cables will adjust their heat output according to ambient temperatures:

- ELEKTRA SelfTec® available as ready-to-install units
 - terminated with a power supply conductor with a sealed plug, for DIY installation on short segments




ELEKTRA VCDR heating cable



ELEKTRA TuffTec™ heating cable



ELEKTRA SelfTec® ready-to-install cable

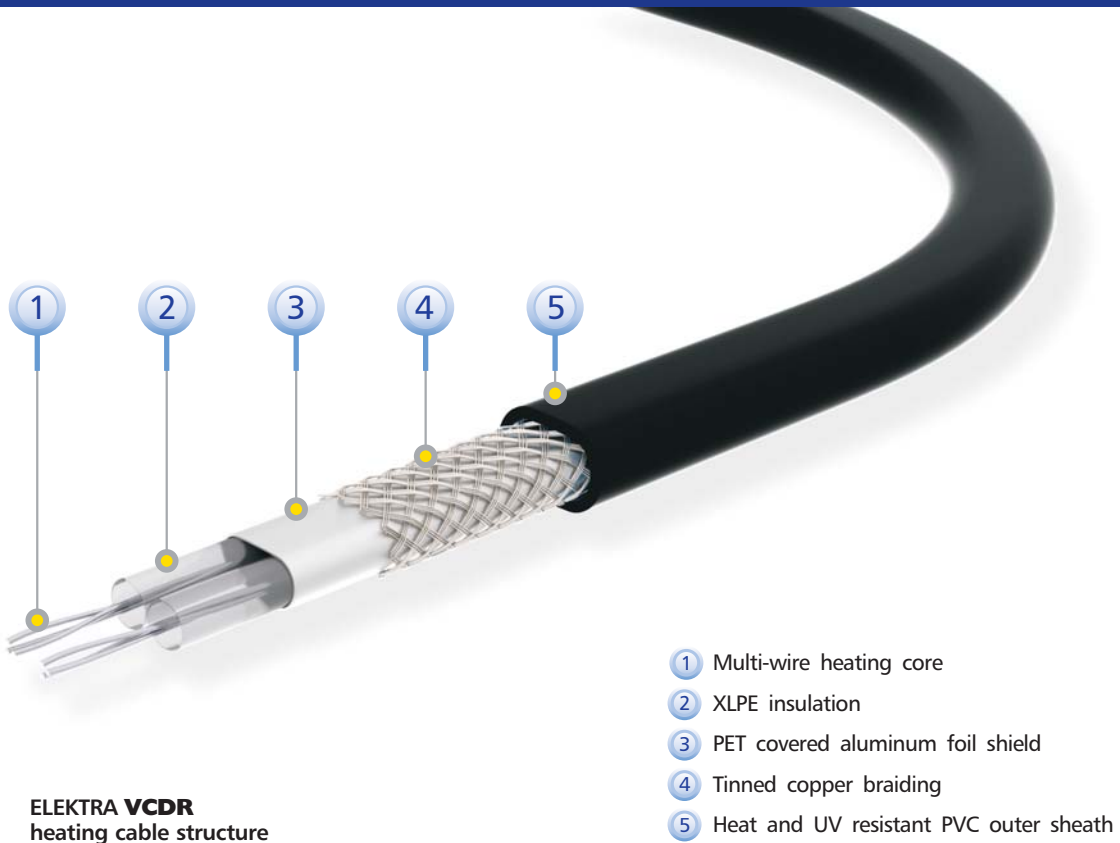

of gutters, downpipes or in other vulnerable places requiring emergency application. The cables do not require installation of temperature controllers, but manual system switch on during snowfall, until complete snow removal. When designing your heating system, account for the cable lengths available in units.

- **ELEKTRA SelfTec®PRO available on spools** – for extended heating systems, carried out by installers. Cables will be adjusted to gutter lengths or roof span directly on a building site. These cables require termination and power supply connection.



ELEKTRA SelfTec®PRO heating cable

	Heating Power			
Ambient temperature	>-5°C	-5°C ÷ -20°C	-20°C ÷ -30°C	<-30°C
Gutters	20 W/m	20 ÷ 40 W/m	40 ÷ 60 W/m	60 W/m
Downpipes	20 W/m	20 ÷ 40 W/m	20 ÷ 40 W/m	40 W/m
Roof runners	200 W/m ²	200 ÷ 250 W/m ²	250 ÷ 300 W/m ²	350 W/m ²
Roof edges	~150 W/m ²	~250 W/m ²	~300 W/m ²	~350 W/m ²
Roof area extending beyond the building outline	~250 W/m ²	~300 W/m ²	~350 W/m ²	~500 W/m ²

The values given above refer to gutters of the Ø100-125 mm diameter. Gutters of larger diameter require application of the 20 W/m higher heat output. Flat roofs, or when roof snow barriers are installed which would cause snow deposition, require increase of the given values with approx. 15%.




Advantages of self-regulating cables


- Cutting directly on site possible, to match the required length (max. cable length 110 m). This option facilitates matching the heating cable's length to that of the heated element on the design-, as well as installation stage.

- Cable crossing possible.
- Ambient temperature drop will automatically increase the cable's heat output.

Required heat output selection will depend on the regional climate conditions, min. ambient temperature and snowfall intensity.

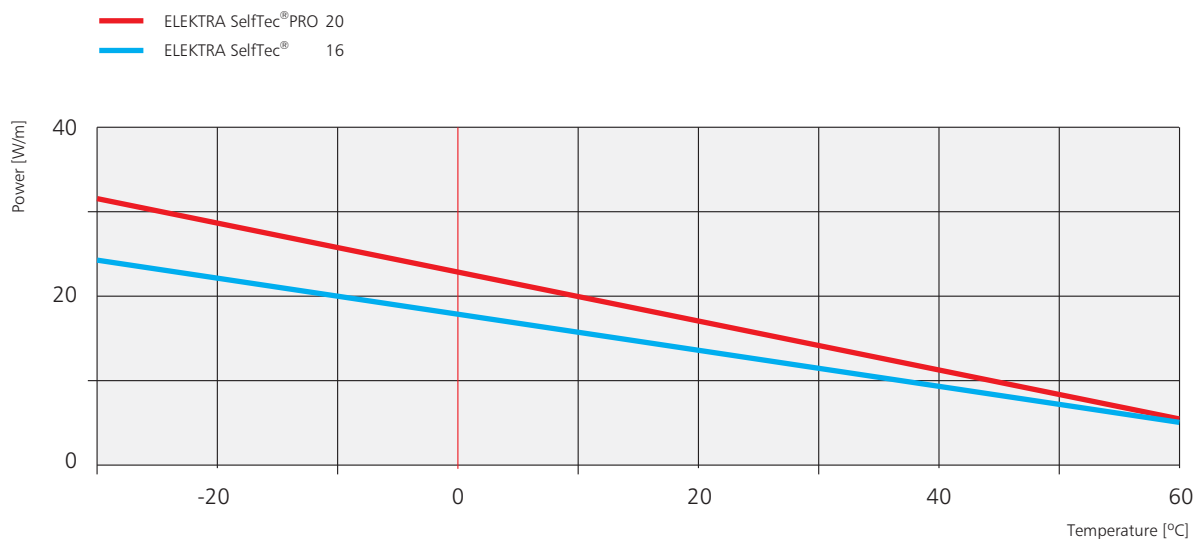

Heating power of the ELEKTRA SelfTec[®] self-regulating cables in the function of temperature

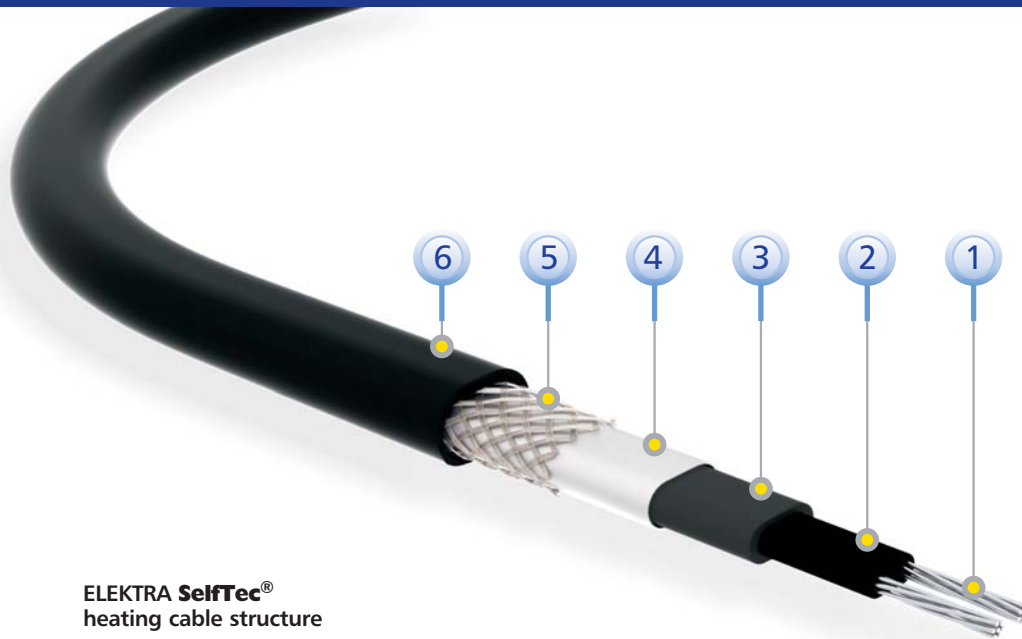


**Only ELEKTRA SelfTec®PRO
cables can be trimmed
to required length**

- ① Tin-coated multi-wire copper conductor
- ② Self-regulating conductive core
- ③ Modified polyolefin insulation
- ④ PET covered aluminum foil shield
- ⑤ Tinned copper braiding
- ⑥ UV resistant halogen free polyolefin outer sheath

For gutter and downpipes the cables usually are installed in 2 runs.

In gutters and downpipes of the min. 12 cm width (diameter), and in climate zones where winters are mild, cables can be one run.

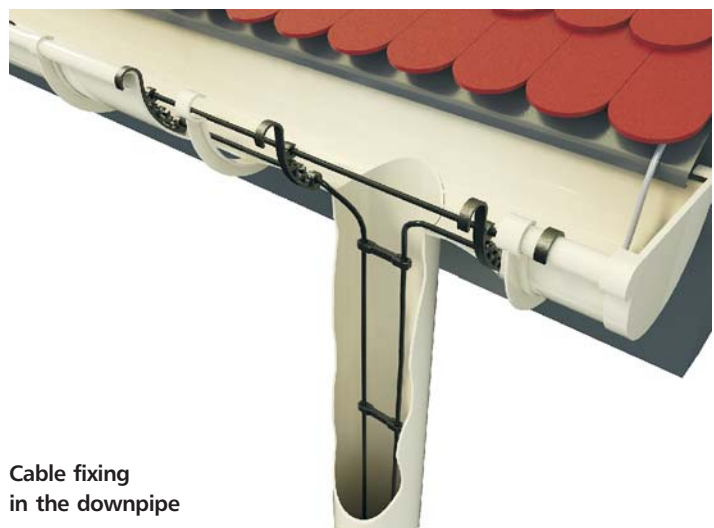

**Cable fixing
in the downpipe**

Heating cable fixing in gutters and roof runners


Gutters

Heating cables can be fixed to gutters and downpipes in either of the two following ways: with holders or spacing wire with clips.


Gutter holder



Gutter spacing wire with clips
(this cable fixing method facilitated later gutter cleaning)

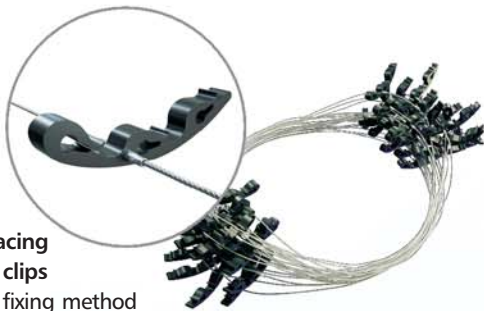

Flexible cable support

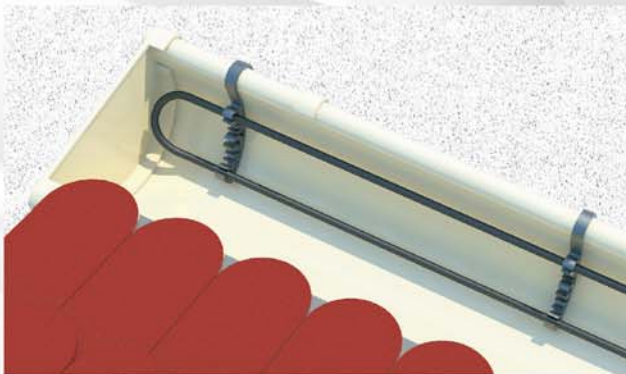

Cable fixing in the gutter

Downpipes

In downpipes, heating cables are fastened by means of clips.

Downpipe spacing clip



In case the length of the downpipe exceeds 6 m, a wire with holders should be used. Holders distancing should not exceed 40 cm.

Downpipe spacing wire with clips



Downpipe spacing wire support bar



Protection of the heating cable against "wear-through"



Cable fixing procedure
in the roof runners

Roof runners



Roof runner
installation
band



Self-adhesive
installation
tape

Protection of roof edges

In regions of intense snowfall,
gutter or downpipes heating
only will not ensure complete
removal of snow and icicles.

It is necessary to warm up the roof
edge adjoining the gutter, at the width
of approx. 50 cm, and entire roof areas
extending beyond the building outline.





Heating cables need to be fixed to the roof surface with copper or titanium zinc alloy-plated holders.

– **on metal sheet-covered roofs**


the holders can be:

- glued to the roof surface,
- fastened through means of rivets (with the fastening insulated with silicone),
- suspended on insulated structural wires.

– **on tiles-covered roofs**

the holders can be:

- fastened to the battens,
- fastened to the battens and structural wires.

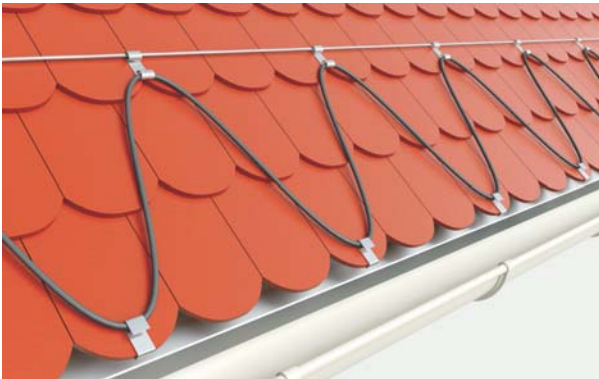

Holders made of titanium zinc or copper

– **on roof felt-, tiled- or bituminous shingles-covered roofs**

the holders should be fastened to the roof by securing strips of thermal weldable roofing membrane across the holders.



Protection of drives, traffic routes, parking spaces and stairs

When heating external areas, it is required to assess the required heat output value per m².

Recommended heat output depends on the regional climate conditions, i.e. minimum ambient temperature, snowfall intensity and wind strength.


Ambient temperature	Power output [W/m ²]
> -5°C	200
-5°C ÷ -20°C	300
-20°C ÷ -30°C	400
< -30°C	500



Higher output is required if the heated area is:

- exposed to low temperatures,
- exposed to wind chill from below:
 - bridges, stairs, loading platforms,
- located in regions of intense snowfall.

ELEKTRA VC
heating cable
structure

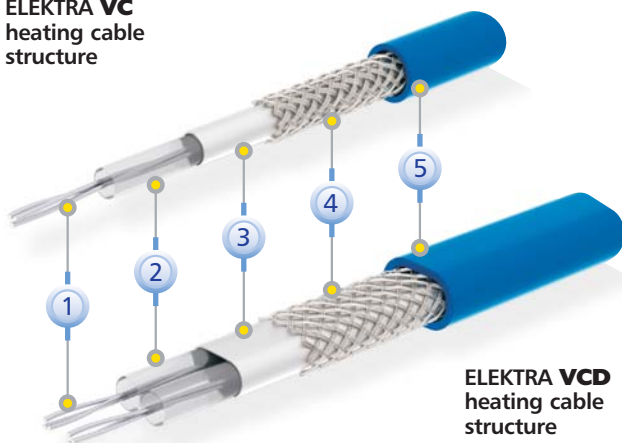

ELEKTRA VCD
heating cable
structure


- 1 Multi-wire heating core
- 2 XLPE insulation
- 3 PET covered aluminum foil shield
- 4 Tinned copper braiding
- 5 Heat resistant PVC outer sheath

Applying insulation layer to the surfaces exposed to wind chill from below can improve the heating system's effectiveness.



For heating external areas, the following options can be utilised:

- ELEKTRA VC20 double-side supplied heating cables (power output 20 W/m),
- ELEKTRA VCD25 single-side supplied heating cables (power output 25 W/m),
- ELEKTRA SnowTec® heating mats, made from ELEKTRA VCD heating cable (mat's power output 300 W/m²).
- ELEKTRA TuffTec™ single-side supplied (power output 30 W/m)
- ELEKTRA SnowTec®_{Tuff} heating mats made from ELEKTRA TuffTec™ heating cable (mat's power output 400 W/m²)

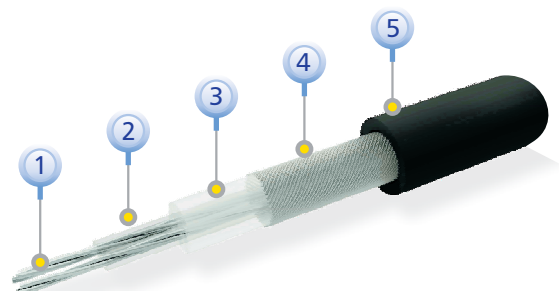

ELEKTRA TuffTec™
heating cable
structure

- 1 Multi-wire heating core
- 2 FEP (Teflon) first insulation layer
- 3 HDPE second insulation layer
- 4 Tinned copper braiding
- 5 UV resistant HFFR outer sheath



Selection of the proper heating cable or heating mat depends on:

- the required power output per m^2 of the heated area,
- time horizon for completing the works on the heating system,
- shape of the heated area, number of power supply cables (double-side supplied cables require having both power supply conductors fed to the installation box, single-side supplied cables – only one),
- the cable's endurance and thermal requirements.

Time horizon for completing the installation of the heating mats is 6-8 times shorter than the one for the heating cable. They require, however, a uniform rectangular area, and are available in one specific output of 300 W/m^2 or 400 W/m^2 .

ELEKTRA TuffTec™ heating cables and SnowTec®_{Tuff} heating mats are intended for installations characterized by increased risk of mechanical damages, e.g. in case when concrete consolidation machinery is utilized for surface works. Due to their exceptionally high thermal properties, as well as resistance against bituminous substances, the TuffTec™ heating cables and SnowTec®_{Tuff} heating mats can be safely laid directly in asphalt.




Installation

Heating mats or cables are laid:


- in a layer of sand bedding or dry concrete, on which paving blocks, concrete paving slab or asphalt will be laid,
- directly in concrete,
- directly in asphalt (TuffTec™ and SnowTec®_{Tuff} exclusively).

To maintain the steady position of the heating cables and retain the fixed – previously calculated – spacing, application of the ELEKTRA TMS steel installation tape is recommended (in sand bedding or directly in asphalt), or the ELEKTRA TME aluminium installation tape (in concrete).

To fix the cable it is also possible to use a $\varnothing 2 \text{ mm}$ -diameter installation grid of the $5 \times 5 \text{ cm}$ mesh. The heating mat also requires fastening in such a way to retain the steady distancing between cables.

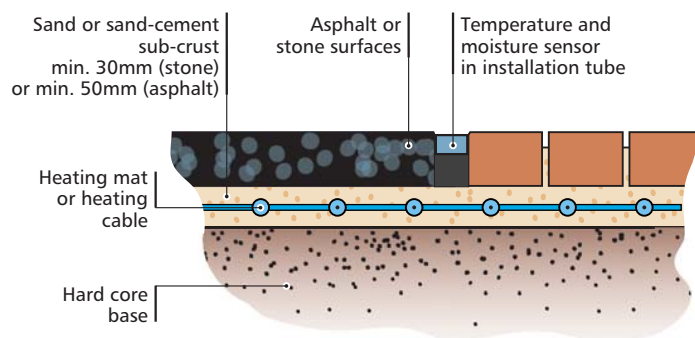


Crosssection of a driveway made of asphalt or paving blocks (installation in a layer of sand bedding)

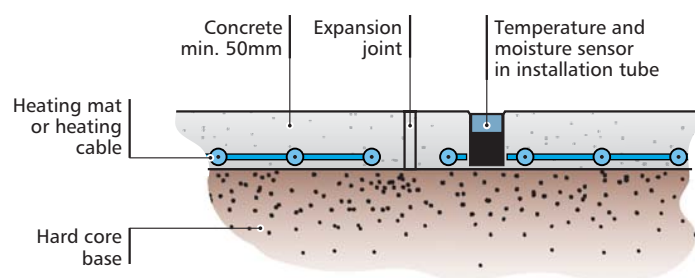

Crosssection of a driveway made of concrete slab (installation directly in concrete)

Length of mats or cables needs to be adjusted so that they would not cross the expansion joints.

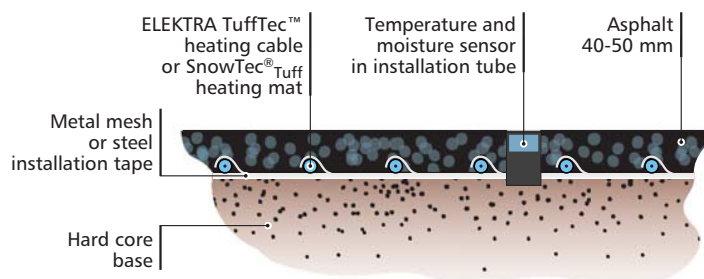


Crosssection of a driveway with asphalt surface (installation directly in asphalt)



The driveway heated with ELEKTRA SnowTec® heating mats

Depending on the cable spacing, it is possible to obtain required output per 1 m² of the heated area. Cable spacing cannot drop below 5 cm.

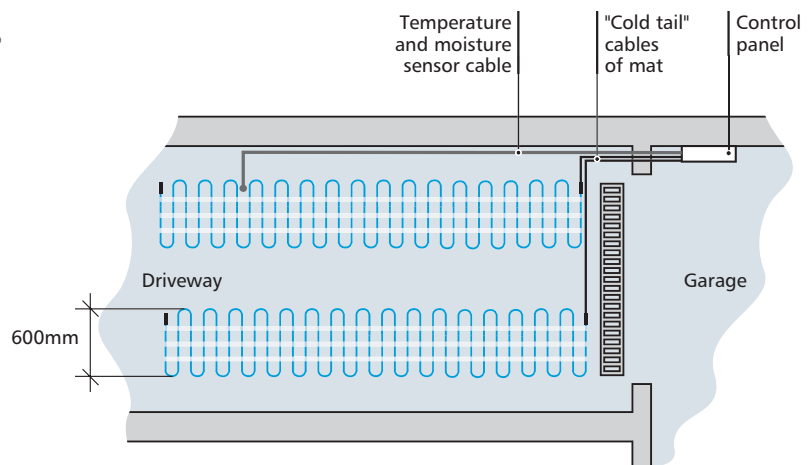

Typical layout of ELEKTRA SnowTec® on driveway to garage

Heating power	20W/m	25W/m	30W/m
[W/m ²]	[mm]	[mm]	[mm]
250	80	100	120
300	~70	80	100
350	~60	~70	~85
400	~50	~60	~75
500	—	50	60



ELEKTRA SnowTec® heating mat

Stairs:




For the stairs heating, the following solutions can be utilised:


- ELEKTRA VC20 double-side supplied heating cables,
- ELEKTRA VCD25 single-side supplied heating cables.

It is recommended to place the cables in the chases cut at the stage of construction of the stairs. In case the heating system needs to be laid on the existing stairs, the cable's type selection depends on the possibility of stairs level elevation.

- If the possibility exists to lay the cables on the stairs surface, they need to be fixed to the ground with a metal wire mesh or **ELEKTRA TME** installation tape. Then the 3 cm-deep layer of concrete slab is poured on the cables. Here, only the ELEKTRA VCD25 single-side supplied cables can be applied (only one power supply conductor needs to be fed into an installation box).

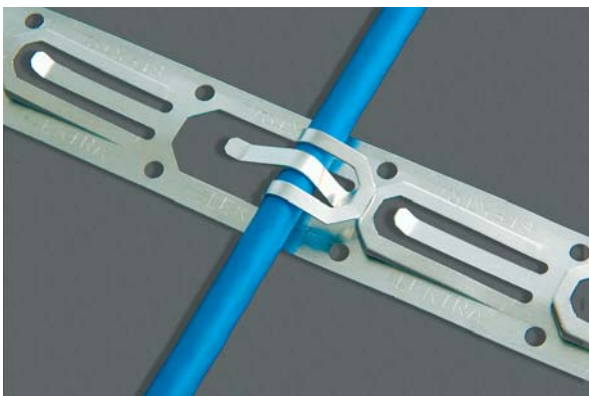

ELEKTRA TME installation tape

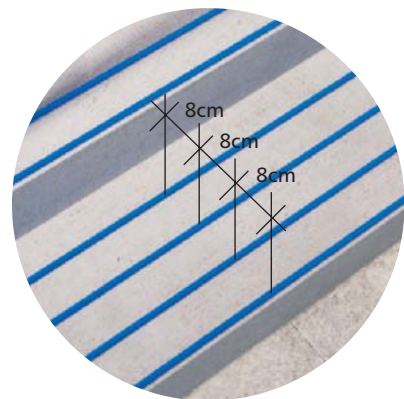

As the substeps are not heated, edge segments of the cable need to be positioned as close to the step's edge as possible.

- If it is not possible to elevate the stairs level, chases need to be made in the steps for the cables to be placed in. ELEKTRA VC20 cables are thinner and more flexible than ELEKTRA VCD25 (both power supply conductors need to be fed into an installation box).

Laying thermal insulation on the steps and landings of the stairs will increase efficiency and shorten the warm-up time of the heating system, which will decrease the system's operation costs.

Laying thermal insulation on the steps and landings of the stairs will increase the heating system's efficiency

ELEKTRA VCD25 heating cables are secured to the floor with ELEKTRA TME installation tape.



ELEKTRA VCD25 heating cable



Snow and ice protection systems' control

Properly selected control system will ensure adequate operation of the heating system only during snow- and freezing rainfall.

A controller with a temperature and moisture sensor will automatically recognize the weather conditions. The heating system will be then kept on standby and only switched on when actually necessary. For this purpose, DIN-bus installed controllers ELEKTRA ETR2 and ETO2 can be utilised.

Properly selected control system will ensure operation of the heating system only during snow- and freezing rainfall

Ground temperature and moisture sensor ETOG-56T and an installation tube ETOK-T (for soil, concrete flagstones, paving cobbles), used for heating control of drives, traffic routes, etc.



Air temperature sensor ETF-744 (for outdoor installation) and moisture sensor ETOR-55 (for gutter bottom installation) used for heating control of roofs and gutters.



ELEKTRA ETR2 controller

(max. load up to 16 A, total output of installed cables must not exceed 3600 W), suitable for – depending on the sensor types – servicing one

- roof and gutter zone or
- one outdoor area (e.g. a single drive, stairs, etc.)



ELEKTRA ETO2 controller

(max. load up to 3 x 16 A), suitable for servicing one or two zones:


- two different roof and gutter zones or
- two outdoor areas (e.g. drive and stairs).



Controllers for snow and ice protection

ELEKTRA ETR2G controller

for protection of outdoor areas. As standard, equipped with one integrated temperature and moisture sensor with installation tube.

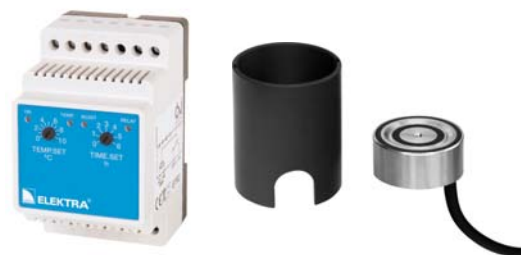

ELEKTRA ETOG2 controller

for applications in extended heating systems, for protection of outdoor areas. As standard, equipped with one integrated temperature and moisture sensor with an installation tube. Additional temperature and moisture sensor can be connected to this controller, which will enable protection of two outdoor areas.



ELEKTRA ETR2R controller

for protection of roofs and gutters. As standard, equipped with one temperature and one moisture sensor.



ELEKTRA ETOR2 controller

for applications in extended heating systems, for protection of roofs and gutters. As standard, equipped with a temperature and a moisture sensor. Additional moisture sensor can be connected to this controller, which will enable protection of two separate roof zones.



ELEKTRA VCDR heating cables single-side supplied

Type	Length [m]	Power output [W]
VCDR 20/190	9.5	190
VCDR 20/235	12.0	235
VCDR 20/330	16.5	330
VCDR 20/380	19.0	380
VCDR 20/520	26.0	520
VCDR 20/600	29.0	600
VCDR 20/800	40.0	800
VCDR 20/1000	50.0	1000
VCDR 20/1140	57.0	1140
VCDR 20/1300	65.0	1300
VCDR 20/1560	78.0	1560
VCDR 20/1720	86.0	1720
VCDR 20/2050	102.0	2050
VCDR 20/2360	118.0	2360
VCDR 20/2710	135.0	2710
VCDR 20/3000	150.0	3000
VCDR 20/3450	175.0	3450

ELEKTRA TuffTec™ heating cables single-side supplied

Type	Dimen- sions [m x m]	Power output [W]
TuffTec™ 30/290	9.5	290
TuffTec™ 30/640	21.0	640
TuffTec™ 30/1230	40.0	1230
TuffTec™ 30/1920	64.0	1920
TuffTec™ 30/2520	83.0	2520
TuffTec™ 30/3030	100.0	3030
TuffTec™ 30/3320	110.0	3320
TuffTec™ 30/3900	130.0	3900

ELEKTRA SelfTec® self-regulating heating cables



Type	Length [m]	Power output [W]
SelfTec® 16/1	1	16
SelfTec® 16/2	2	32
SelfTec® 16/3	3	48
SelfTec® 16/5	5	80
SelfTec® 16/7	7	112
SelfTec® 16/10	10	160
SelfTec® 16/15	15	240
SelfTec® 16/20	20	320
SelfTec® 16/X	up to 72 m	at individual order

Type	Info
SelfTec®PRO 20	self-regulating heating cable for advanced applications, 20 W/m (+10°C)

ELEKTRA SelfTec®PRO accessories

EC-PRO


joint set

ECM25-PRO

joint set
with M25 gland

KF 5045-PRO

Junction box with terminals
for three heating circuits,
with an M25 gland
for the power supply
conductor.



ELEKTRA VC heating cables double-side supplied 20 W/m

Type	Length [m]	Power output [W]
VC 20/110	5.5	110
VC 20/140	7.5	140
VC 20/185	9.0	185
VC 20/215	11.0	215
VC 20/265	13.5	265
VC 20/330	17.0	330
VC 20/400	20.0	400
VC 20/465	23.5	465
VC 20/530	27.0	530
VC 20/630	32.0	630
VC 20/730	37.0	730
VC 20/830	42.0	830
VC 20/930	46.0	930
VC 20/1130	57.0	1130
VC 20/1410	70.0	1410
VC 20/1820	92.0	1820
VC 20/2210	110.0	2210
VC 20/2460	120.0	2460
VC 20/2880	145.0	2880
VC 20/3140	155.0	3140
VC 20/3440	175.0	3440
VC 20/3830	190.0	3830
VC 20/4130	207.0	4130
VC 20/4480	225.0	4480

ELEKTRA SnowTec® heating mats single-side supplied

Type	Dimensions [m x m]	Heating surface [m²]	Power output [W]
SnowTec® 300/2	2 x 0.6	1.20	400
SnowTec® 300/3	3 x 0.6	1.80	520
SnowTec® 300/4	4 x 0.6	2.40	670
SnowTec® 300/5	5 x 0.6	3.00	930
SnowTec® 300/7	7 x 0.6	4.20	1140
SnowTec® 300/10	10 x 0.6	6.00	1860
SnowTec® 300/13	13 x 0.6	7.80	2560
SnowTec® 300/16	16 x 0.6	9.60	2890
SnowTec® 300/21	21 x 0.6	12.60	3730

ELEKTRA VCD heating cables single-side supplied 25 W/m

Type	Length [m]	Power output [W]
VCD 25/120	4.5	120
VCD 25/170	7.0	170
VCD 25/265	10.5	265
VCD 25/320	12.5	320
VCD 25/365	15.0	365
VCD 25/420	17.0	420
VCD 25/505	20.0	505
VCD 25/585	23.0	585
VCD 25/655	26.5	655
VCD 25/725	29.5	725
VCD 25/890	36.0	890
VCD 25/1120	44.0	1120
VCD 25/1450	58.0	1450
VCD 25/1740	70.0	1740
VCD 25/1910	77.0	1910
VCD 25/2270	92.0	2270
VCD 25/2480	98.0	2480
VCD 25/2730	110.0	2730
VCD 25/3030	120.0	3030
VCD 25/3300	130.0	3300
VCD 25/3550	142.0	3550

ELEKTRA SnowTec_{Tuff} heating mats single-side supplied

Type	Dimensions [m x m]	Heating surface [m²]	Power output [W]
SnowTec _{Tuff} 400/1.5	0.6 x 1.5	0.9	330
SnowTec _{Tuff} 400/3.0	0.6 x 3.0	1.8	730
SnowTec _{Tuff} 400/6.0	0.6 x 6.0	3.6	1350
SnowTec _{Tuff} 400/9.0	0.6 x 9.0	5.4	2150
SnowTec _{Tuff} 400/12.0	0.6 x 12.0	7.2	2750
SnowTec _{Tuff} 400/14.0	0.6 x 14.0	8.4	3370
SnowTec _{Tuff} 400/16.0	0.6 x 16.0	9.6	3650
SnowTec _{Tuff} 400/18.0	0.6 x 18.0	10.8	4400

Product selection guide

		Heating Cables						Heating Mats		
		Constant wattage				Self-regulating				
Application	Heating Power	VC 20	VCD 25	VCDR 20	TuffTec™	SelfTec®16	SelfTec®PRO 20	SnowTec®	SnowTec® Tuff	Control
Driveways, paths, parking space	200-300 [W/m²]	+	+	—	+	—	—	+	+	ETOG2* ETR2G
Ramps, bridges	250-300 [W/m²]	+	+	—	+	—	—	+	+	
Stairs	250-300 [W/m²]	+	+	—	—	—	—	—	—	
Roofs, roof runners	200-300 [W/m²]	—	—	+	+	+	+	—	—	ETOR2* ETR2R
Gutters, downpipes	20-60 [W/m]	—	—	+	+	+	+	—	—	

* An ETOG2 or ETOR2 controller may be used with an additional sensor for a second zone

DISTRIBUTORS AND INSTALLERS WORLDWIDE!

