


1U Telescopic Rail - Patch & Splice Management Panels



Front Patching Shelves are used to terminate and distribute optical fiber cables, termination box is ranging from 12 ports to 24 ports (12 fibers to 48 fibers). They are convenient equipment to organize and connect the fiber optic links. It is suitable for the use in telecommunication network, central office optical cable system and premise fiber networks.

Typical type of our fiber patch panels are rack mounted, they are with optional different kinds of fiber optic adapters ports and pre-installed inner trays and accessories, optional pigtailed with different types, common style is SC/FC/ST/LC, E2000 types can be custom made based on quantity


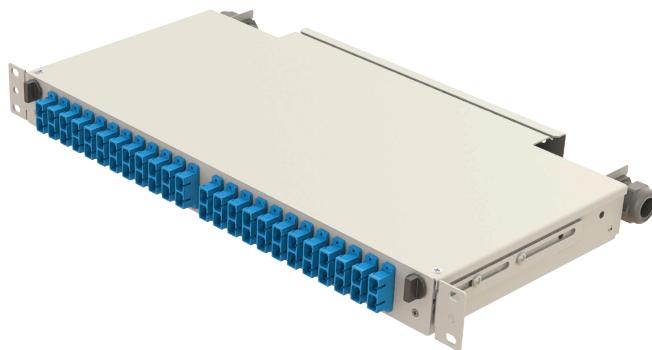


Features

- Easy time-saving installation
- Telescopic Rail System
- Different front panel options
- Compact and safe design
- Rear cable entry
- Captive Panel Screws ensure easy/safe locking of the drawer
- Easy connector and cable accessibility
- Bend radius protection

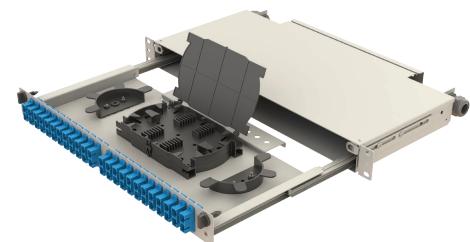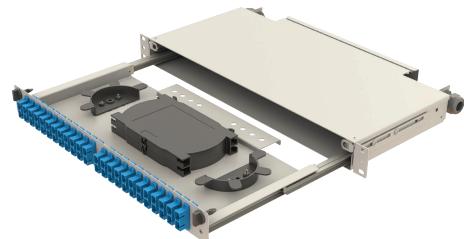


Dimensions

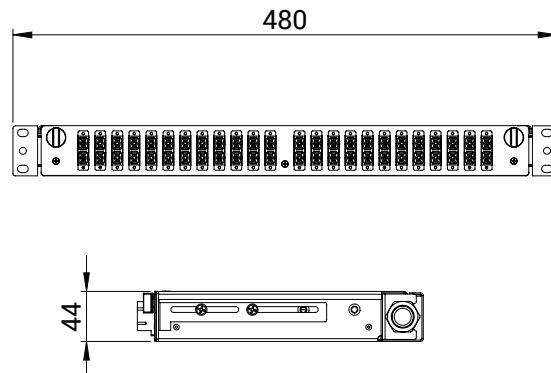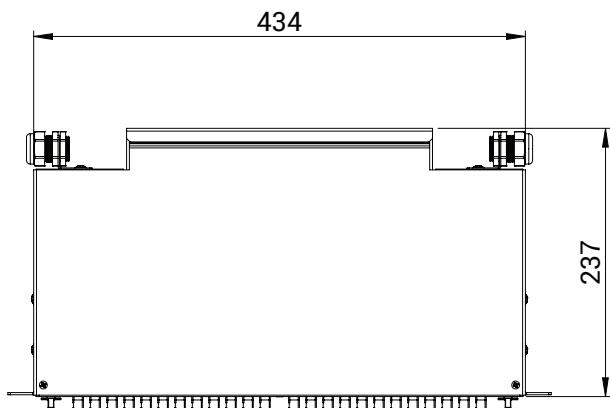

1U - Telescopic Rail - Front Panels

Choose Front Panel			
Front Panels	Panel Code	Hole Count	Available Adapter- Fiber Capacity
	EFP31	12	SC Simplex - 12 Fibers LC Duplex - 24 Fibers E2000 Simplex - 12 Fibers
	EFP32	12	SC Duplex - 24 Fibers LC Quad - 48 Fibers E2000 Duplex - 24 Fibers
	EFP33	24	SC Simplex - 24 Fibers E2000 Simplex - 24 Fibers
	EFP34	24	SC Duplex - 48 Fibers
	EFP35	24	FC Simplex - 24 Fibers ST Simplex - 24 Fibers

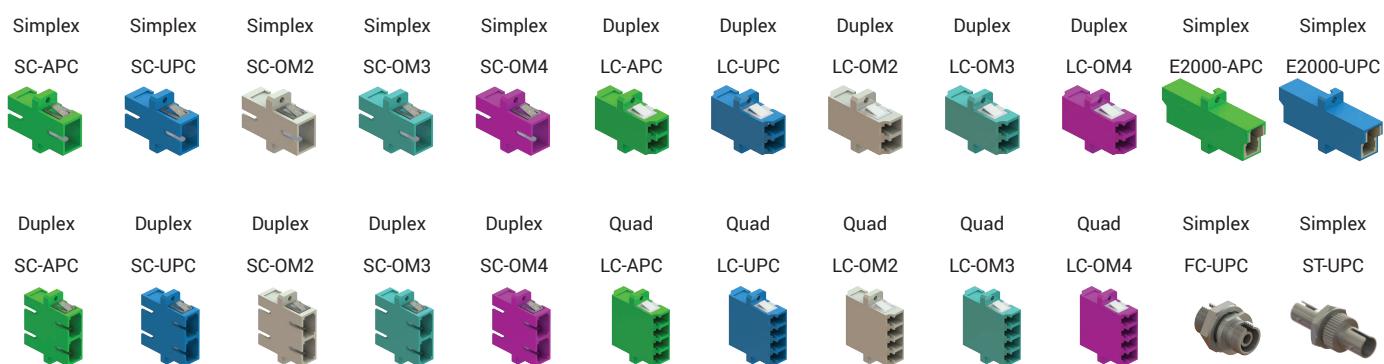

Ordering Coding 19" Front Patch Shelves

(sample coding)

EFRPS - 1U - TR - EFP31 - A2 - SC - SX - 12

Height	Rail System	Front Panel	Fiber Type	Connector	Port Options	Fiber Count			
44 mm: 1U	Telescopic Rail: TR	Panel-31: EFP31 Panel-32: EFP32 Panel-33: EFP33 Panel-34: EFP34 Panel-35: EFP35	Empty: G657.A1: G657.A2: G652.OM2: G652.OM3: G652.OM4:	NN A1 A2 M2 M3 M4	Empty: SC/UPC: SC/APC: LC/UPC: LC/APC: FC/UPC: FC/APC: ST/UPC: E2000/UPC: E2000/APC:	NN SC SA LC LA FC FA ST E2 EA	Empty: Simplex: Duplex: Quad: NN SX DX QD	Empty: 12 Fibers: 24 Fibers: 48 Fibers:	NN 12 24 48