

2U Telescopic Rail - Patch & Splice Management Panels

Front Patching Shelves are used to terminate and distribute optical fiber cables, termination box has 24 or 48 ports (from 24 fibers to 96 fibers). They are convenient equipment to organize and connect the fiber optic links. It is suitable for the use in telecommunication network, central office optical cable system and premise fiber networks.

Typical type of our fiber patch panels are rack mounted, they are with optional different kinds of fiber optic adapters ports and pre-installed inner trays and accessories, optional pigtailed with different types, common style is SC/FC/ST/LC, E2000 types can be custom made based on quantity






Features

- Easy time-saving installation
- Telescopic Rail System
- Different front panel options
- Compact and safe design
- Rear cable entry
- Captive Panel Screws ensure easy/safe locking of the drawer
- Easy connector and cable accessibility
- Bend radius protection




Dimensions

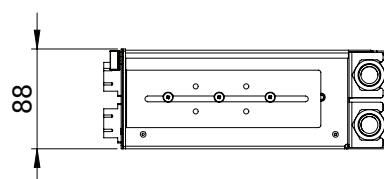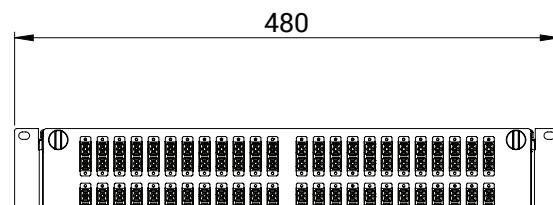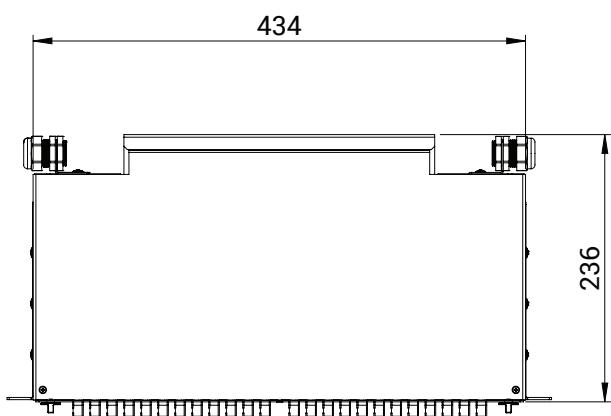

2U - Telescopic Rail - Front Panels

Choose Front Panel			
Front Panels	Panel Code	Hole Count	Available Adapter- Fiber Capacity
A front panel with 24 rectangular ports.	EFP41	24	SC Simplex - 24 Fibers LC Duplex - 48 Fibers E2000 Simplex - 24 Fibers
A front panel with 24 rectangular ports.	EFP42	24	SC Duplex - 48 Fibers LC Quad - 96 Fibers
A front panel with 48 rectangular ports.	EFP43	48	SC Simplex - 48 Fibers LC Duplex - 96 Fibers E2000 Simplex - 48 Fibers
A front panel with 48 rectangular ports.	EFP44	48	SC Duplex - 96 Fibers
A front panel with 48 circular ports.	EFP45	48	FC Simplex - 24 Fibers ST Simplex - 24 Fibers

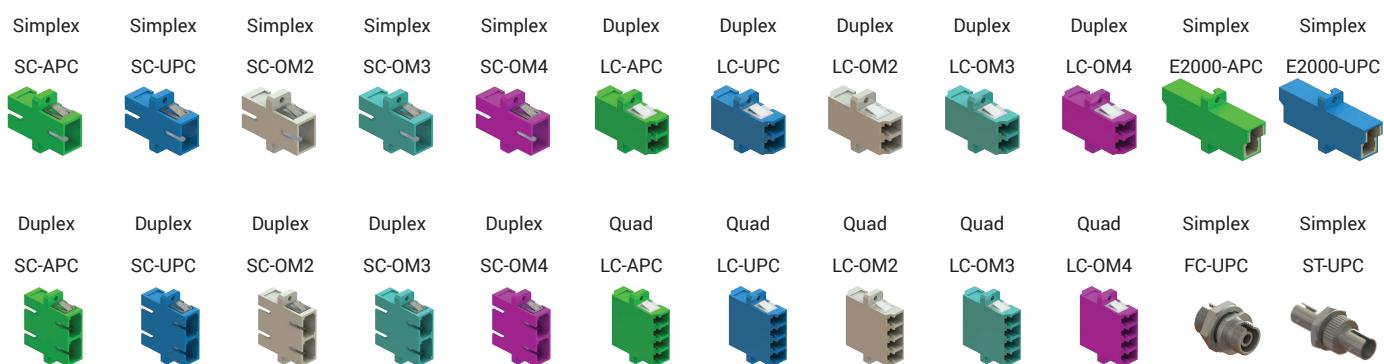

Ordering Coding 19" Front Patch Shelves

(sample coding)

EFRPS - 2U - TR - EFP41 - A2 - SC - SX - 24

Height	Rail System	Front Panel	Fiber Type	Connector	Port Options	Fiber Count			
88 mm: 2U	Telescopic Rail: TR	Panel-41: EFP41 Panel-42: EFP42 Panel-43: EFP43 Panel-44: EFP44 Panel-45: EFP45	Empty: G657.A1: G657.A2: G652.OM2: G652.OM3: G652.OM4:	NN A1 A2 M2 M3 M4	Empty: SC/UPC: SC/APC: LC/UPC: LC/APC: FC/UPC: FC/APC: ST/UPC: E2000/UPC: E2000/APC:	NN SC SA LC LA FC FA ST E2 EA	Empty: Simplex: Duplex: Quad: NN SX DX QD	Empty: 48 Fibers: 96 Fibers	NN 48